

Date \_\_\_\_\_

Name \_\_\_\_\_

Client \_\_\_\_\_

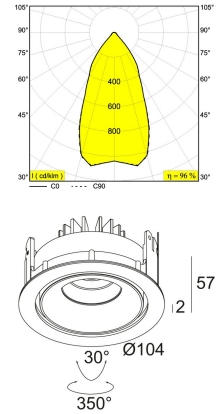
Project Name \_\_\_\_\_

Quote# \_\_\_\_\_

Type/Quantity \_\_\_\_\_

**REO OK 3050 S2**  
**202 372 28132**

[Weblink](#)



Cutout shape/size:	98 mm
Recessed depth:	65 mm
Available colors:	ALU GREY (202 372 28132 A) WHITE (202 372 28132 W)
ADJUSTABLE 0° - 30° / 350° INCL.1 x POWERLED WHITE 7-10W / CRI>80 / 3000K / max.958lm INCL.1 x REFLECTOR WFL-50° EXCL.LED POWER SUPPLY 350-500mA-DC	
LED Technics:	Light source: 958 lm // 10 W // 91 lm/W Luminaire: 920 lm // 12 W // 80 lm/W
Class:	III
Weight:	0.4 KG
Protection level:	IP23/20-20/20
Minimum distance:	n.a.
Options:	LED POWER SUPPLY 350 / 500mA-DC DIM













For detailed installation instructions, please consult the manual. [202\\_37\\_28122\\_HAND.pdf](#)

**REO OK 3050 S2**


202 372 28132

**Related references**

**LED POWER SUPPLIES**

<p><a href="#">Weblink / Specs sheet</a></p>  <p>LED POWER CONVERTOR 24V -&gt; 350mA / 15W 300 2415 350 Number of luminaires: 2</p>	<p><a href="#">Weblink / Specs sheet</a></p>  <p>LED POWER SUPPLY 350mA-DC / 15W 300 90 91 100-240V / 50-60Hz Number of luminaires: 2(1)</p>	<p><a href="#">Weblink / Specs sheet</a></p>  <p>LED POWER SUPPLY 350mA-DC / 16W DIM8 300 90 3112 110-240V / 50-60Hz Number of luminaires: 2</p>	<p><a href="#">Weblink / Specs sheet</a></p>  <p>LED POWER SUPPLY 350mA-DC / 17W 300 90 913 100-240V / 50-60Hz Number of luminaires: 2(1)</p>
<p><a href="#">Weblink / Specs sheet</a></p>  <p>LED POWER SUPPLY 350mA-DC / 18W DIM8 300 90 116 220-240V / 50-60Hz Number of luminaires: min.2 - max.2</p>	<p><a href="#">Weblink / Specs sheet</a></p>  <p>LED POWER SUPPLY 350mA-DC / 8W 300 90 108 100-240V / 50-60Hz Number of luminaires: 1</p>	<p><a href="#">Weblink / Specs sheet</a></p>  <p>LED POWER SUPPLY 500mA-DC / 20W 300 90 92 110-240V / 50-60Hz Number of luminaires: 1</p>	<p><a href="#">Weblink / Specs sheet</a></p>  <p>LED POWER SUPPLY 500mA-DC / 20W DIM8 300 90 117 220-240V / 50-60Hz Number of luminaires: 1</p>
<p><a href="#">Weblink / Specs sheet</a></p>  <p>LED POWER SUPPLY 500mA-DC / 32W DIM8 300 90 5120 110-240V / 50-60Hz Number of luminaires: min.2 - max.2</p>	<p><a href="#">Weblink / Specs sheet</a></p>  <p>LED POWER SUPPLY MULTI- POWER 300 90 914 110-240V / 50-60Hz Number of luminaires: 3 / 3 / - / - / -</p>	<p><a href="#">Weblink / Specs sheet</a></p>  <p>LED POWER SUPPLY MULTI- POWER DIM1 300 90 64 120-240V / 50-60Hz Number of luminaires: 2(1) / 2(1) / -</p>	<p><a href="#">Weblink / Specs sheet</a></p>  <p>LED POWER SUPPLY MULTI- POWER DIM5 300 90 68 110-240V / 50-60Hz Number of luminaires: 1 / 2(1) / - / -</p>

[Weblink / Specs sheet](#)




LED POWER SUPPLY MULTI-  
POWER DIM6  
300 90 61

220-240V / 50-60Hz

Number of luminaires: 1 / 1 / -

[Weblink / Specs sheet](#)




LED POWER SUPPLY MULTI-  
POWER DIM7  
300 90 60

110-240V / 50-60Hz

Number of luminaires: 1 / 1 / -

[Weblink / Specs sheet](#)



LED POWER SUPPLY MULTI-  
POWER DIM9  
300 90 63


120-240V / 50-60Hz

Number of luminaires: 3 / 3 / - / -

## Related references

# CONTROL GEAR, BALLAST AND TRANSFORMERS

[Weblink / Specs sheet](#)



LED POWER CONVERTOR  
24V-DC TO MULTI CURRENT  
48W DIM9  
300 90 67

Number of luminaires: 3 x 2

REO OK 3050 S2  
202 372 28132

**Project picture**

