

## UHO L TRIMLESS 92730 FBR

27217 9220 FBR

BESCHIKBAAR IN




**ZWART** 27217 9220 B

**FLEMISH BRONZE** 27217 9220 FBR

**FLEMISH GOLD** 27217 9220 FG

**GOUD KLEUR** 27217 9220 GC

**WIT** 27217 9220 W

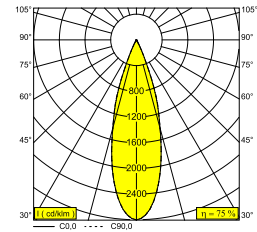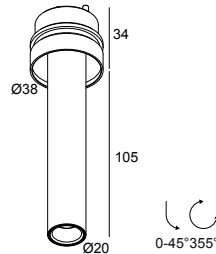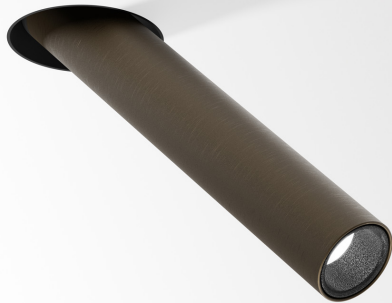

 [Bekijk op website](#)

### Algemene info

<b>LOCATIE</b>	binnen
<b>INSTALLATIE</b>	Plafond Inbouw
<b>ZAAGMAAT/OPENING (MM)</b>	rond - Ø KIT
<b>INBOUWDIEPTE (MM)</b>	75
<b>STOF EN WATERDICHTHEID</b>	IP20
<b>GEWICHT (KG)</b>	0.2
<b>RICHTBAARHEID</b>	0° tot 45° zwenkbaar, 355° roteerbaar
<b>INFO</b>	REFLECTOR FL-30° EXCL.LED POWER SUPPLY 350-1050mA-DC UHO TUBE B included

### Elektrische info

<b>KLASSE</b>	III
<b>ENERGIE KLASSE</b>	F

### Info lichtbron

Lightsource Name	LED
Lichtbron	LED cluster 1-3,1W / CRI>90 (R9: 50) / 2700K / 120-303lm
TM-30-15 Waarden	Rf: 91 / Rg: 99
SDCM	SDCM3
Risk-groep	RG2
LM80	L90B10 > 120000
LED techniek (lichtbron)	303lm // 3,1W // 98lm/W
LED techniek (toestel)	228lm // 4W // 64lm/W

### Benodigheden

MOUNTING KIT UHO L TRIMLESS  
LED POWER SUPPLY 350 / 500 / 700 / 1050mA-DC DIM

Voor gedetailleerde montage gegevens, consulteer de handleiding: [27217\\_XXX0\\_HAND.pdf](#)

## UHO L TRIMLESS 92730 FBR

27217 9220 FBR










### PLAFOND COMPATIBILITEIT

Ceiling Type	Mounting Kit	
 <b>System ceiling</b>	 MOUNTING KIT UHO L TRIMLESS	Required
 <b>Plasterboard</b>	 MOUNTING KIT UHO L TRIMLESS	Required
 <b>Stucanet</b>	 MOUNTING KIT UHO L TRIMLESS	Required

## UHO L TRIMLESS 92730 FBR


27217 9220 FBR

### VERVOLLEDIG UW SPECIFICATIE

LED voedingen	#
 <p><b>300 48 350 ED1</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1</p>	3->14 <input type="checkbox"/>
 <p><b>300 48 350 ED5</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5</p>	3->14 <input type="checkbox"/>
 <p><b>300 48 350 MDL</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL</p>	3->14 <input type="checkbox"/>
 <p><b>300 48 350 WDL</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL</p>	3->14 <input type="checkbox"/>
 <p><b>300 48 500 ED1</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1</p>	3->14 <input type="checkbox"/>
 <p><b>300 48 500 ED5</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5</p>	3->14 <input type="checkbox"/>
 <p><b>300 48 500 MDL</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL</p>	3->14 <input type="checkbox"/>
 <p><b>300 48 500 WDL</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL</p>	3->14 <input type="checkbox"/>
 <p><b>300 48 700 ED1</b> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM1</p>	3->14 <input type="checkbox"/>


**UHO L TRIMLESS 92730 FBR**

27217 9220 FBR




**300 48 700 ED5** LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5

3->14




**300 48 700 MDL** LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W MDL

3->14




**300 48 700 WDL** LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W WDL

3->14




**300 90 61** LED POWER SUPPLY MULTI-POWER DIM6

1->16/1->16/1->16




**300 90 63** LED POWER SUPPLY MULTI-POWER DIM9

1->25 (25)/1->25 (25)/1->25 (20)/1->20 (13)




**300 90 64** LED POWER SUPPLY MULTI-POWER DIM7

4->18 (15)/1->17 (10)/1->16 (7)




**300 90 67** LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9

3->15/3->15/3->15



**300 90 68** LED POWER SUPPLY MULTI-POWER DIM5

2->16 (15)/2->16 (10)/2->16 (7)



**300 90 69** LED POWER SUPPLY MULTI-POWER HV DIM9

8->39 (39)/1->39 (28)/1->30 (20)




**300 90 124** LED POWER SUPPLY MULTI-POWER DIM7

6->17 (15)/2->14 (10)/2->10 (7)

**UHO L TRIMLESS 92730 FBR**


27217 9220 FBR



**300 90 125**

LED POWER SUPPLY MULTI-POWER MINI DIM5


4->17 (15)/2->14 (10)/2->9 (7)



**300 90 135**

LED POWER SUPPLY MULTI-POWER HV


17->29/12->29/10->30/10->23



**300 90 136**

LED POWER SUPPLY MULTI-POWER HC DIM9


1->15 (13)



**300 90 148**

LED POWER SUPPLY 1050mA-DC / 22W


1->7 (4)



**21012 0010**

LED POWER SUPPLY MULTI POWER


6->15 / 4->15 / 4->15 / 4->13



**21012 0021**

LED POWER SUPPLY MULTI POWER DIM1


4->18 / 4->18 / 4->17 / 4->12



**21012 0035**

LED POWER SUPPLY MULTI POWER DIM5


4->18 / 4->18 / 4->18 / 4->12



**21012 004W**

LED POWER SUPPLY MULTI-POWER WDL


1->25 (25)/1->25 (25)/1->25 (20)/1->20 (13)



**21012 005W**

LED POWER SUPPLY MULTI-POWER COMPACT WDL

4->18/4->18/4->17/4->12



**21012 0258**


LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8

7->10



# UHO L TRIMLESS 92730 FBR


27217 9220 FBR



**21012 0268**

LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8


10->14



**21012 0278**

LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8


6->9 / 6->9



**21012 0288**

LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8


12->18 / 12->18



**21012 0298**

LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8


3->15 / 3->14 / 3->9



**21012 0308**

LED POWER SUPPLY 350mA / 7,35W DIM8


5->7



**21012 0318**

LED POWER SUPPLY 500mA / 10W DIM8


5->7



**21012 0328**

LED POWER SUPPLY 700mA / 15W DIM8


5->7



**21032 0295**

LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5


3->14



**21032 0305**

LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

3->14



**21032 0315**

LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5

3->14




# UHO L TRIMLESS 92730 FBR

27217 9220 FBR

## Montage kit

---



**15212 2060** MOUNTING KIT UHO L TRIMLESS



Notes: