

SMART KUP 160 DIFFUSE IP54 LED GE


Smart kup is one of the 3 forms of the Smart family. The cone of the Smart kup ends in a fine trim. A trim particular Modular. The same subtle trim is used in several other Modular luminaires. The Smart family's styling is based on our most popular designs. Concretely this means that the luminaires consist of a light source (LED or halogen) which can be combined with one of three trims to suit your needs. The new spotlights can be combined with Smart mask, Smart surface box or surface tubed to form the perfect solution for any interior. Choose a white, black or gold finishing. Also available in different sizes, fix and adjustable, IP version, ...

Art. Nr. 13025232

SPECIFICATIONS

| | | | | | | |
|----------------|--------------------|--------|--------|--------|---------------|--------|
| Lamp | 1x LED Array | | | | | |
| Gear / Transfo | LED gear not incl. | | | | | |
| Cut-out size | ø 146 h 250 | | | | | |
| Weight | 0.91kg | | | | | |
| Min. Distance | 0.1 m | | | | | |
| IP | IP54 | | | | | |
| Glow Wire Test | 960° | | | | | |
| CRI | 90 | | | | | |
| Power supply | 500mA | 700mA | 900mA | 1050mA | 1200mA | 1400mA |
| | 32.1Vf | 33.6Vf | 34.2Vf | 34.6Vf | 35Vf | 35.5Vf |
| Connected load | 16W | 23.5W | 30.8W | 36.3W | 42W | 49.7W |
| Lumen | 1482lm | 2017lm | 2504lm | 2896lm | 3252lm | 3745lm |
| Efficacy | 93lm/W | 86lm/W | 81lm/W | 80lm/W | 77lm/W | 75lm/W |
| UGR | 22 | 23 | 24 | 24 | 25 | 25 |
| Adjustability | Not Applicable | | | | | |

| | WARM WHITE 2700K / CRI 90+ | WARM WHITE 3000K / CRI 90+ | NEUTRAL WHITE 4000K / CRI 90+ |
|-------------|-------------------------------|-------------------------------|----------------------------------|
| | WIDE FLOOD 80° | WIDE FLOOD 80° | WIDE FLOOD 80° |
| black struc | 13025032 | 13025132 | 13025232 |
| white struc | 13025009 | 13025109 | 13025209 |

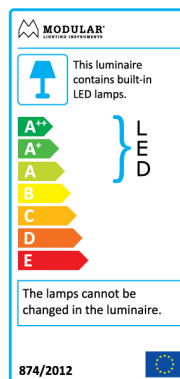

This label is available in other languages:
<http://supermodular.com/assets/TYPE2.pdf>

