

PRODUCT FAMILY DATASHEET

DOWNLIGHT COMFORT

Downlights with adjustable white light colors



AREAS OF APPLICATION

- Direct replacement for luminaires with compact fluorescent lamps
- General illumination
- Bathrooms, kitchens and sheltered outdoor areas
- Offices
- Corridors
- Foyers
- Shops
- Stairways

PRODUCT BENEFITS

- Three light color in one luminaire: Warm White, Cool White, Daylight White
- Simple installation thanks to integrated driver
- Easy installation with fast connection
- 5 years guarantee

PRODUCT FEATURES

- Three light colors selectable via slide switch
- Type of protection: IP54
- Connector box with push wire terminal for tool-free connection
- Through wiring possible







TECHNICAL DATA

Product description	Electrical data			Photometrical data			Light technical data	Dimensions & weight			
	Nominal wattage	Nominal voltage	Mains frequency	Luminous flux	Light color (designation)	Color rendering index Ra	Beam angle	Diameter	Height	Product weight	Mounting diameter
DL COMFORT DN 130 13 W 3000 K 4000 5700 3CCT IP54 WT	13.00 W	100...277 V	50/60 Hz	1030 lm@3000 K/1110 lm@5700 K/1210 lm@4000 K lm	Warm White/Cool White/Cool Daylight	>80	60 °	145.0 mm	82.0 mm	265.00 g	130 mm
DL COMFORT DN 155 18 W 3000 K 4000 5700 3CCT IP54 WT	18.00 W	100...277 V	50/60 Hz	1040 lm@3000 K/1620 lm@4000 K/1470 lm@5700 K lm	Warm White/Cool White/Cool Daylight	>80	60 °	172.0 mm	95.0 mm	350.00 g	155.0 mm
DL COMFORT DN 205 20 W 3000 K 4000 5700 3CCT IP54 WT	20.00 W	100...277 V	50/60 Hz	1720 lm@3000 K/1930 lm@4000 K/1810 lm@5700 K lm	Warm White/Cool White/Cool Daylight	>80	60 °	228.0 mm	98.0 mm	550.00 g	205.0 mm
Product description	Colors & materials		Temperatures & operating conditions		Lifespan						
	Body material	Product color	Cover material	Ambient temperature range	Lifespan L70 at 25 °C	Lifespan L80 at 25 °C	Lifespan L90 at 25 °C				
DL COMFORT DN 130 13 W 3000 K 4000 5700 3CCT IP54 WT	Aluminum	White	Polymethylmethacrylate (PMMA)	-20...45 °C	50000 h	45000 h	30000 h				
DL COMFORT DN 155 18 W 3000 K 4000 5700 3CCT IP54 WT	Aluminum	White	Polymethylmethacrylate (PMMA)	-20...45 °C	50000 h	43000 h	30000 h				

Colors & materials		Temperatures & operating conditions		Lifespan			
Product description	Body material	Product color	Cover material	Ambient temperature range	Lifespan L70 at 25 °C	Lifespan L80 at 25 °C	Lifespan L90 at 25 °C
DL COMFORT DN 205 20 W 3000 K 4000 5700 3CCT IP54 WT	Aluminum	White	Polymethylmethacrylate (PMMA)	-20...45 °C	50000 h	43000 h	30000 h

Product description	Capabilities		Certificates & standards	
	Dimmable	Type of connection	Protection class	Type of protection
DL COMFORT DN 130 13 W 3000 K 4000 5700 3CCT IP54 WT	No	Push button terminal, 2-pole	II	IP54
DL COMFORT DN 155 18 W 3000 K 4000 5700 3CCT IP54 WT	No	Push button terminal, 2-pole	II	IP54
DL COMFORT DN 205 20 W 3000 K 4000 5700 3CCT IP54 WT	No	Push button terminal, 2-pole	II	IP54

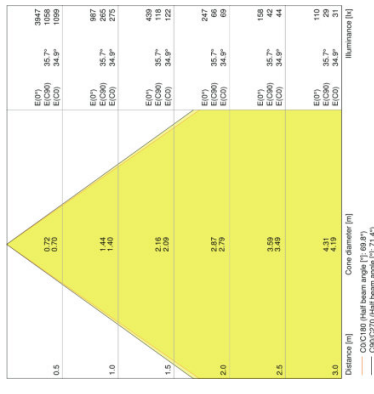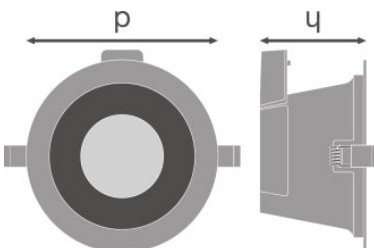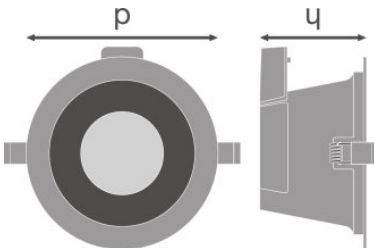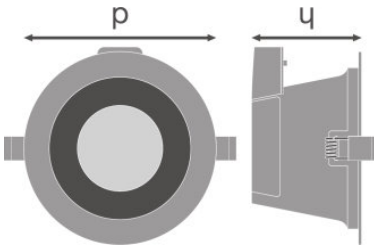


DL COMFORT DN 130 13 W 3000 K
4000 5700 3CCT IP54 WT

DL COMFORT DN 155 18 W 3000 K
4000 5700 3CCT IP54 WT

DL COMFORT DN 205 20 W 3000 K
4000 5700 3CCT IP54 WT

DL COMFORT DN 130 13 W 3000 K
4000 5700 3CCT IP54 WT

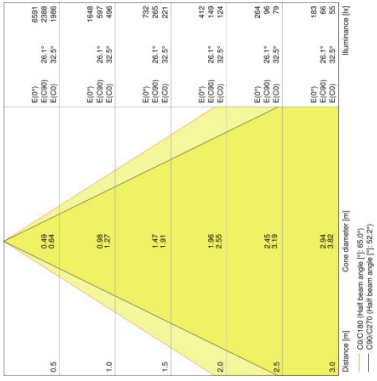

DL COMFORT DN 155 18 W 3000 K
4000 5700 3CCT IP54 WT

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075104068	DL COMFORT DN 130 13 W 3000 K 4000 5700 3CCT IP54 WT	Shipping carton box 8	360 mm x 360 mm x 270 mm	34.99 dm ³	3632.00 g
4058075104082	DL COMFORT DN 155 18 W 3000 K 4000 5700 3CCT IP54 WT	Shipping carton box 8	410 mm x 410 mm x 300 mm	50.43 dm ³	4680.00 g
4058075104105	DL COMFORT DN 205 20 W 3000 K 4000 5700 3CCT IP54 WT	Shipping carton box 8	520 mm x 520 mm x 300 mm	81.12 dm ³	7350.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see
▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.