


LED FLEXIBELE STRIP BRONZE SERIE

LED FLEXIBLE STRIP BRONZE SERIE

FOR INDOOR USE ONLY

LED FLEXIBELE STRIP BRONZE SERIE (LED FLEXIBLE STRIP BRONZE SERIE)

60 LEDs/m (3528)
4.8W/m



12Vdc - 4612011.
24Vdc - 4622011.

008

120 LEDs/m (3528)
9.6W/m



24Vdc - 4622012.

010

240 LEDs/m (3528)
19.2W/m



24Vdc - 4622014.

011

30 LEDs/m (5050)
7.2W/m



12Vdc - 4612211.
24Vdc - 4622211.

013

60 LEDs/m (5050)
14.4W/m



12Vdc - 4612111.
24Vdc - 4622111.

014



60 LEDs/m (335)
4.8W/m



12Vdc - 4613011.

015

LED FLEXIBELE STRIP BRONZE SERIE (LED FLEXIBLE STRIP BRONZE SERIE)

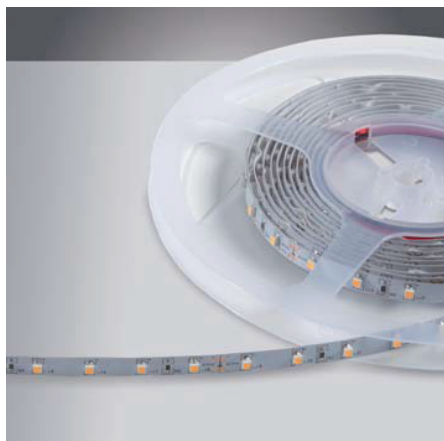

ROL À 5 MTR / 24W
ROLE OF 5 MTR

Bedrijfstemperatuur: -20°C ~ 50°C
Operating temperature: -20°C ~ 50°C

Voedingen en controllers, vanaf pagina 98
Drivers and controllers, from page 98


Aluminium LED profielen, vanaf pagina 78
Aluminum LED profiles, from page 78

Uitermate flexibele LED strip. Deze LED strip is bedoeld voor binnentoepassingen en is aan de achterzijde voorzien van een 3M plakstrip zodat de LED strip eenvoudig op een stof- en vetvrije ondergrond kan worden gemonteerd. De LED strip kan eenvoudig worden ingekort op de aangegeven markeringen. Leverbaar in een scala aan verschillende lichtkleuren, zowel in 12Vdc alsook 24Vdc uitvoering en te dimmen door middel van een optioneel te leveren controller.

Toepassingsgebieden: als accent-, achtergrond- en koofverlichting in kantoren, horeca, winkels, representatieve ruimtes en interieurbouw.

Flexible LED strip. This LED strip is intended for indoor applications and is equipped with a 3M double-sided adhesive strip for easy mounting on a flat clean surface. The LED strip can easily be shortened at the indicators on the strip. Available in a variety of different light colors, both in 12Vdc and 24Vdc. Also dimmable with optional available controller.

Applications: as accent, background and cove lighting in offices, hospitality, retail, promotional areas and interior design.

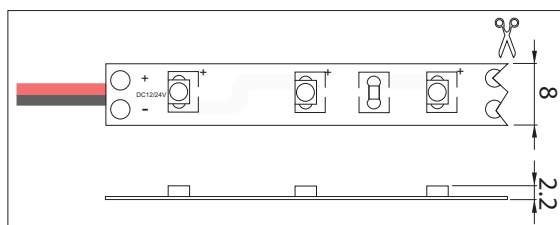

Type LED	LEDs/m	Afmetingen (LxBxH) Dimensions (LxWxH) (mm)	Vermogen Power consumption (W/m)	Voltage (Vdc)	∅ (mm)	Kleur Color	Lichtstroom Lightoutput (Lm/m)	Golflengte-/Kleurtemp. Wavelength-/Color temp.	Art. nr.
3528	60	5000x8x2.2	4,8	12	50		120	615NM	46120110
								585NM	46120111
							150	460NM	46120112
							240	515NM	46120113
							120	370NM	46120116
							390	6000K	46120114
							310	3000K	46120115
							245	2700K	46120118
							220	2400K	46120119
				24	100		120	615NM	46220110
								585NM	46220111
							150	460NM	46220112
							240	515NM	46220113
							120	370NM	46220116
							390	6000K	46220114
							310	3000K	46220115
							245	2700K	46220118
							220	2400K	46220119

LET OP: Zorg altijd voor een goede koeling van de LED strip. Hoge temperaturen, ontstaan door slechte koeling, kunnen de levensduur drastisch verkorten. Voor aluminium montage- en koelprofielen zie pagina 78 en verder.


NOTE: Be sure to provide proper cooling of the LED strip. High temperatures, caused by poor cooling, can shorten the lifetime drastically. For aluminum mounting and cooling profiles see page 78 and beyond.



- UITERMATE FLEXIBELE LED STRIP.
- VERKRIJGBAAR IN MEERDERE KLEUREN.
- VOORZIEN VAN DUBBELZIJDIGE 3M PLAKSTRIP.
- EENVOUDIG IN LENGTE IN TE KORTEN.
- DIMMEN MOGELIJK DOOR MIDDEN VAN OPTIONELE CONTROLLER.
- TOEPASSINGSGEBIEDEN: ALS ACCENT-, ACHTERGROND-, EN KOOFVERLICHTING IN KANTOREN, HORECA, WINKELS, REPRESENTATIEVE RUIMTES EN INTERIEURBOUW.

- FLEXIBLE LED STRIP.
- AVAILABLE IN SEVERAL COLORS.
- EQUIPPED WITH A 3M DOUBLE-SIDED ADHESIVE STRIP.
- CAN EASY BE CUT TO SIZE.
- DIMMABLE WITH OPTIONAL CONTROLLER.
- APPLICATIONS: AS ACCENT, BACKGROUND AND COVE LIGHTING IN OFFICES, HOSPITALITY, RETAIL, PROMOTIONAL AREAS AND INTERIOR DESIGN.

LED FLEXIBELE STRIP BRONZE SERIE (LED FLEXIBLE STRIP BRONZE SERIE)



ROL À 5 MTR / 48W
ROLE OF 5 MTR

Bedrijfstemperatuur: -20°C ~ 50°C
Operating temperature: -20°C ~ 50°C

Voedingen en controllers, vanaf pagina 98
Drivers and controllers, from page 98


Aluminium LED profielen, vanaf pagina 78
Aluminum LED profiles, from page 78

Uitermate flexibele LED strip. Deze LED strip is bedoeld voor binnentoepassingen en is aan de achterzijde voorzien van een 3M plakstrip zodat de LED strip eenvoudig op een stof- en vetvrije ondergrond kan worden gemonteerd. De LED strip kan eenvoudig worden ingekort op de aangegeven markeringen. Leverbaar in een scala aan verschillende lichtkleuren in 24Vdc uitvoering. Dimbaar door middel van een optioneel te leveren controller.

Toepassingsgebieden: als accent-, achtergrond- en koofverlichting in kantoren, horeca, winkels, representatieve ruimtes en interieurbouw.

Flexible LED strip. This LED strip is intended for indoor applications and is equipped with a 3M double-sided adhesive strip for easy mounting on a flat clean surface. The LED strip can easily be shortened at the indicators on the strip. Available in a variety of different light colors in 24Vdc. Also dimmable with optional available controller.

Applications: as accent, background and cove lighting in offices, hospitality, retail, promotional areas and interior design.

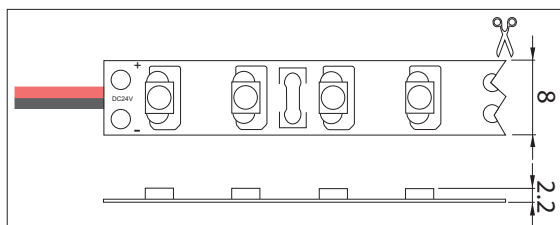


Type LED	LEDs/m	Afmetingen (LxBxH) Dimensions (LxWxH) (mm)	Vermogen Power consumption W/m	Voltage (Vdc)	∅ (mm)	Kleur Color	Lichtstroom Lightoutput (Lm/m)	Golflengte- / Kleurtemp. Wavelength- / Color temp.	Art. nr.
3528	120	5000x8x2.2	9.6	24	50		240	615NM	46220120
								585NM	46220121
							300	460NM	46220122
							480	515NM	46220123
							240	370NM	46220126
							780	6000K	46220124
							620	3000K	46220125
							490	2700K	46220128
							440	2400K	46220129

LET OP: Zorg altijd voor een goede koeling van de LED strip. Hoge temperaturen, ontstaan door slechte koeling, kunnen de levensduur drastisch verkorten. Voor aluminium montage- en koelprofielen zie pagina 78 en verder.

NOTE: Be sure to provide proper cooling of the LED strip. High temperatures, caused by poor cooling, can shorten the lifetime drastically. For aluminum mounting and cooling profiles see page 78 and beyond.

LED FLEXIBELE STRIP BRONZE SERIE (LED FLEXIBLE STRIP BRONZE SERIE)

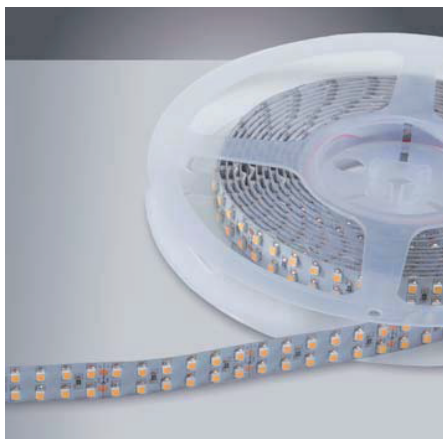

ROL À 5 MTR / 96W
ROLE OF 5 MTR

Bedrijfstemperatuur: -20°C ~ 50°C
Operating temperature: -20°C ~ 50°C

Voedingen en controllers, vanaf pagina 98
Drivers and controllers, from page 98


Aluminium LED profielen, vanaf pagina 78
Aluminum LED profiles, from page 78

Uitermate flexibele LED strip. Deze LED strip is bedoeld voor binnentoepassingen en is aan de achterzijde voorzien van een 3M plakstrip zodat de LED strip eenvoudig op een stof- en vetvrije ondergrond kan worden gemonteerd. De LED strip kan eenvoudig worden ingekort op de aangegeven markeringen. Leverbaar in een scala aan verschillende lichtkleuren in 24Vdc uitvoering. Dimbaar door middel van een optioneel te leveren controller.

Toepassingsgebieden: als accent-, achtergrond- en koofverlichting in kantoren, horeca, winkels, representatieve ruimtes en interieurbouw.

Flexible LED strip. This LED strip is intended for indoor applications and is equipped with a 3M double-sided adhesive strip for easy mounting on a flat clean surface. The LED strip can easily be shortened at the indicators on the strip. Available in a variety of different light colors in 24Vdc. Also dimmable with optional available controller.

Applications: as accent, background and cove lighting in offices, hospitality, retail, promotional areas and interior design.

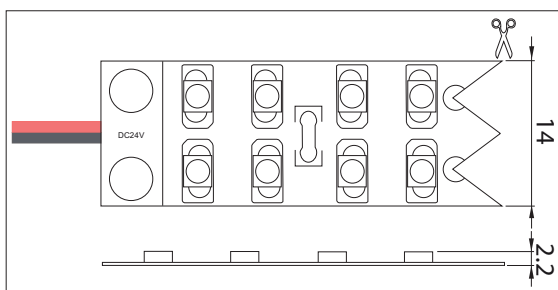

Type LED	LEDs/m	Afmetingen (LxBxH) Dimensions (LxWxH) (mm)	Vermogen Power consumption W/m	Voltage (Vdc)	✂ (mm)	Kleur Color	Lichtstroom Lightoutput (Lm/m)	Golflengte-/ Kleurtemp. Wavelength-/Colortemp.	Art. nr.
3528	240	5000x14x2.2	19.2	24	50		480	615NM	46220140
								585NM	46220141
							600	460NM	46220142
							960	515NM	46220143
							480	370NM	46220146
							1560	6000K	46220144
							1240	3000K	46220145
							980	2700K	46220148
							880	2400K	46220149



LET OP: Zorg altijd voor een goede koeling van de LED strip. Hoge temperaturen, ontstaan door slechte koeling, kunnen de levensduur drastisch verkorten. Voor aluminium montage- en koelprofielen zie pagina 78 en verder.

NOTE: Be sure to provide proper cooling of the LED strip. High temperatures, caused by poor cooling, can shorten the lifetime drastically. For aluminum mounting and cooling profiles see page 78 and beyond.



PROLUMIA®

LED FLEXIBELE STRIP BRONZE SERIE (LED FLEXIBLE STRIP BRONZE SERIE)

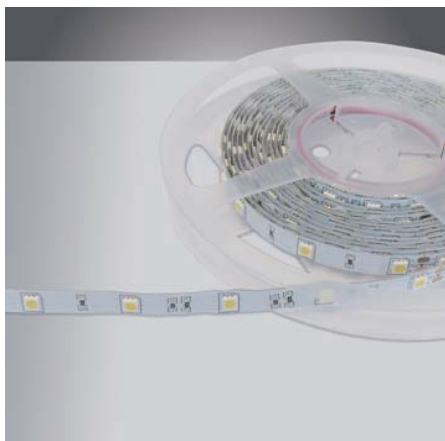

ROL À 5 MTR / 36W
ROLE OF 5 MTR

Bedrijfstemperatuur: -20°C ~ 50°C
Operating temperature: -20°C ~ 50°C

Voedingen en controllers, vanaf pagina 98
Drivers and controllers, from page 98


Aluminium LED profielen, vanaf pagina 78
Aluminum LED profiles, from page 78

Uitermate flexibele LED strip. Deze LED strip is bedoeld voor binnentoepassingen en is aan de achterzijde voorzien van een 3M plakstrip zodat de LED strip eenvoudig op een stof- en vetvrije ondergrond kan worden gemonteerd. De LED strip kan eenvoudig worden ingekort op de aangegeven markeringen. Leverbaar in een scala aan verschillende lichtkleuren, zowel in 12Vdc alsook 24Vdc uitvoering en te dimmen door middel van een optioneel te leveren controller.

Toepassingsgebieden: als accent-, achtergrond- en koofverlichting in kantoren, horeca, winkels, representatieve ruimtes en interieurbouw.

Flexible LED strip. This LED strip is intended for indoor applications and is equipped with a 3M double-sided adhesive strip for easy mounting on a flat clean surface. The LED strip can easily be shortened at the indicators on the strip. Available in a variety of different light colors, both in 12Vdc and 24Vdc. Also dimmable with optional available controller.

Applications: as accent, background and cove lighting in offices, hospitality, retail, promotional areas and interior design.


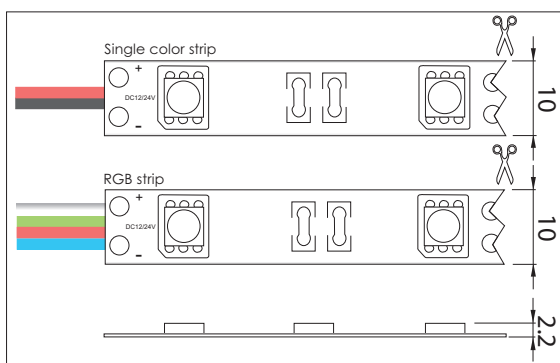


Type LED	LEDs/m	Afmetingen (LxBxH) Dimensions (LxWxH) (mm)	Vermogen Power consumption W/m	Voltage (Vdc)	✂ (mm)	Kleur Color	Lichtstroom Lightoutput (Lm/m)	Golflengte-/ Wavelength-/ Color temp.	Art. nr.
5050	30	5000x10x2.2	7.2	12	100		180	615NM	46122110
								585NM	46122111
							225	460NM	46122112
							360	515NM	46122113
							180	370NM	46122116
							255	RGB	46122117
							445	6000K	46122114
							380	3000K	46122115
							390	2700K	46122118
							405	2400K	46122119
				24	167		180	615NM	46222110
								585NM	46222111
							225	460NM	46222112
							360	515NM	46222113
							180	370NM	46222116
							255	RGB	46222117
							445	6000K	46222114
							380	3000K	46222115
							390	2700K	46222118
	405	2400K	46222119						

LET OP: Zorg altijd voor een goede koeling van de LED strip. Hoge temperaturen, ontstaan door slechte koeling, kunnen de levensduur drastisch verkorten. Voor aluminium montage- en koelprofielen zie pagina 78 en verder.

NOTE: Be sure to provide proper cooling of the LED strip. High temperatures, caused by poor cooling, can shorten the lifetime drastically. For aluminum mounting and cooling profiles see page 78 and beyond.

LED FLEXIBELE STRIP BRONZE SERIE (LED FLEXIBLE STRIP BRONZE SERIE)

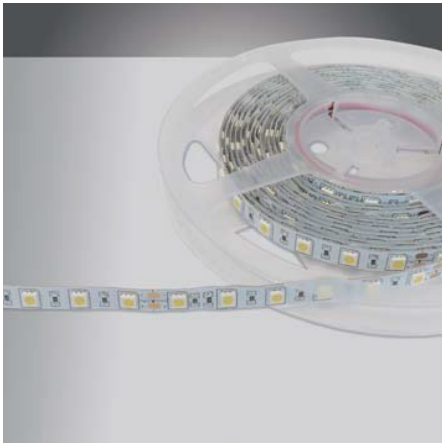

ROL À 5 MTR / 72W
ROLE OF 5 MTR

Bedrijfstemperatuur: -20°C ~ 50°C
Operating temperature: -20°C ~ 50°C

Voedingen en controllers, vanaf pagina 98
Drivers and controllers, from page 98


Aluminium LED profielen, vanaf pagina 78
Aluminum LED profiles, from page 78

Uitermate flexibele LED strip. Deze LED strip is bedoeld voor binnentoepassingen en is aan de achterzijde voorzien van een 3M plakstrip zodat de LED strip eenvoudig op een stof- en vetvrije ondergrond kan worden gemonteerd. De LED strip kan eenvoudig worden ingekort op de aangegeven markeringen. Leverbaar in een scala aan verschillende lichtkleuren, zowel in 12Vdc alsook 24Vdc uitvoering en te dimmen door middel van een optioneel te leveren controller.

Toepassingsgebieden: als accent-, achtergrond- en koofverlichting in kantoren, horeca, winkels, representatieve ruimtes en interieurbouw.

Flexible LED strip. This LED strip is intended for indoor applications and is equipped with a 3M double-sided adhesive strip for easy mounting on a flat clean surface. The LED strip can easily be shortened at the indicators on the strip. Available in a variety of different light colors, both in 12Vdc and 24Vdc. Also dimmable with optional available controller.

Applications: as accent, background and cove lighting in offices, hospitality, retail, promotional areas and interior design.

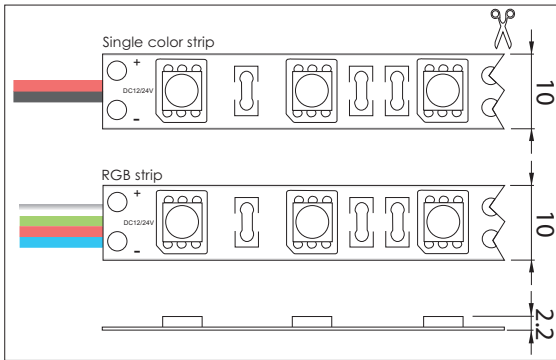


Type LED	LEDs/m	Afmetingen (LxBxH) Dimensions (LxWxH) (mm)	Vermogen Power consumption W/m	Voltage (Vdc)	✂️ (mm)	Kleur Color	Lichtstroom Lightoutput (Lm/m)	Golflengte-/ Wavelength-/ Color temp.	Art. nr.
5050	60	5000x10x2.2	14.4	12	50		360	615NM	46121110
								585NM	46121111
							450	460NM	46121112
								515NM	46121113
							360	370NM	46121116
							510	RGB	46121117
							890	6000K	46121114
							760	3000K	46121115
							780	2700K	46121118
					810	2400K	46121119		
				24	100		360	615NM	46221110
								585NM	46221111
							450	460NM	46221112
								515NM	46221113
							360	370NM	46221116
							510	RGB	46221117
							890	6000K	46221114
							760	3000K	46221115
	780	2700K	46221118						
	810	2400K	46221119						

LET OP: Zorg altijd voor een goede koeling van de LED strip. Hoge temperaturen, ontstaan door slechte koeling, kunnen de levensduur drastisch verkorten. Voor aluminium montage- en koelprofielen zie pagina 78 en verder.

NOTE: Be sure to provide proper cooling of the LED strip. High temperatures, caused by poor cooling, can shorten the lifetime drastically. For aluminum mounting and cooling profiles see page 78 and beyond.

LED FLEXIBELE STRIP BRONZE SERIE (LED FLEXIBLE STRIP BRONZE SERIE)



ROL À 5 MTR / 24W
ROLE OF 5 MTR

Bedrijfstemperatuur: -20°C ~ 50°C
Operating temperature: -20°C ~ 50°C

Voedingen en controllers, vanaf pagina 98
Drivers and controllers, from page 98


Aluminium LED profielen, vanaf pagina 78
Aluminum LED profiles, from page 78

Uitermate flexibele "side emitting" LED strip. In tegenstelling tot de standaard LED strip, wordt het licht naar een zijkant uitgestraald in plaats van naar voren. Deze LED strip is bedoeld voor binnentoepassingen en is aan de achterzijde voorzien van een 3M plakstrip zodat de LED strip eenvoudig op een stof- en vetvrije ondergrond kan worden gemonteerd. De LED strip kan eenvoudig worden ingekort op de aangegeven markeringen. Leverbaar in een scala aan verschillende lichtkleuren in 12Vdc uitvoering. Dimbaar door middel van een optioneel te leveren controller.

Toepassingsgebieden: als accent-, achtergrond- en koofverlichting in kantoren, horeca, winkels, representatieve ruimtes en interieurbouw.

Flexible "side emitting" LED strip. Unlike the standard LED strip, the light is emitted to one side, instead of to the front. This LED strip is intended for indoor applications and is equipped with a 3M double-sided adhesive strip for easy mounting on a flat clean surface. The LED strip can easily be shortened at the indicators on the strip. Available in a variety of different light colors in 12Vdc. Also dimmable with optional available controller.

Applications: as accent, background and cove lighting in offices, hospitality, retail, promotional areas and interior design.

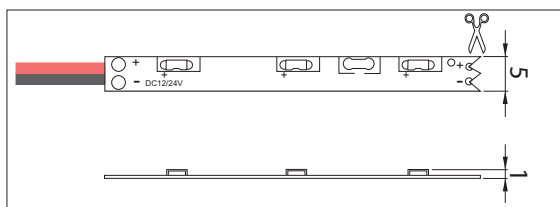

Type LED	LEDs/m	Afmetingen (LxBxH) Dimensions (LxWxH) (mm)	Vermogen Power consumption W/m	Voltage (Vdc)	✂ (mm)	Kleur Color	Lichtstroom Lightoutput (Lm/m)	Golflengte-/ Kleurtemp. Wavelength-/Color temp.	Art. nr.
335	60	5000x5x1	4.8	12	50		120	615NM	46130110
								585NM	46130111
							150	460NM	46130112
							240	515NM	46130113
							120	370NM	46130116
							390	6000K	46130114
							360	3000K	46130115

LET OP: Zorg altijd voor een goede koeling van de LED strip. Hoge temperaturen, ontstaan door slechte koeling, kunnen de levensduur drastisch verkorten. Voor aluminium montage- en koelprofielen zie pagina 78 en verder.

NOTE: Be sure to provide proper cooling of the LED strip. High temperatures, caused by poor cooling, can shorten the lifetime drastically. For aluminum mounting and cooling profiles see page 78 and beyond.