


Specification: Gyro IsoSafe DimToWarm



Article code: **5046 901231**
EAN: 7021989012313




Light technic

Type of light source: LED (not exchangeable)
Wattage: 6W
System wattage: 7,3W
Luminous flux: 520lm
Efficacy: 87 lm/W
Voltage: 230V
Colour temperature: 2000-2800K
Colour rendering (CRI): Ra>95
MacAdams factor: SDCM: 3
Lifetime: L80/B20>50,000
Light distribution: Direct
Beam angle: 42°




Control/Dimming

Type: Phase cut

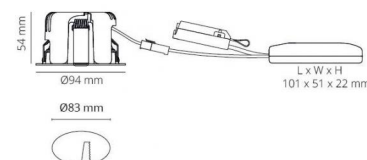

Protection

Luminaire class: Class II
Ingress protection rating: IP44
Ta nominal: Ta=25°C

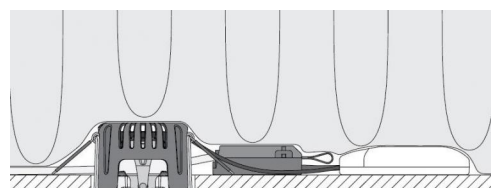

Energy and approvals

Energy class: A++
Approval: CE

Materials and finish

Housing: Aluminium
Colour: Matte white (RAL 9003)
Optics: Glass

Mounting/Connection

Mounting: Recessed
Plug: Screwless terminal block

Dimensions (mm)

Height (H): 56
Diameter (D): 94
Cut-out: 83
Ceiling void depth: 54
Distance to flammable materials: 0mm
Weight (brutto/netto): 0.5

Packaging

Packing dimensions: 115 x 115 x 95



7 0 2 1 9 8 9 0 1 2 3 1 3