

## SylMirror SYLMIRROR LED SLIM IP44 WW 0043241



### Product features

- LED mirror/cabinet light with 8W total power consumption, 560 lumen, 110° beam angle, IP44, IK03, CRI 80, 3000K colour temperature, 25,000 hours average life time, 400 mm length, 2 year warranty. Slim shape.



### NOTES

undefined

### PRODUCT OVERVIEW

Artikelnummer	0043241
Productnaam	SYLMIRROR LED SLIM IP44 WW
Technologie	LED
Housing	Aluminum
Montage	Wall/Cabinet
Type armatuur (open/gesloten)	Enclosed
Algemene toepassing	Residential & Consumer,
Certificeringen	EUNEW009
ETIM Class	EC002892
E-nummer FI	4170557
E-nummer SE	7505163
Fixture luminous flux (lm)	560
Luminaire efficacy (lm/W)	70
LOR (%)	100
Kleurtemperatuur (K)	3000
Lichtkleur	Warm White
CRI (Ra)	80
Initiële kleurvariatie (SDCM)	6
Photobiological Risk Group	RG0
Totaal energieverbruik (W)	8
Electrical protection	Class II
Type ballast	Electronic (constant current)
Dimmable	No
Gemiddelde levensduur (nominaal) (u)	25000
Kleur behuizing	Chrome
IP waarde	IP44
IK waarde	IK03
EAN code	5410288432410
Lamps	No

## SylMirror SYLMIRROR LED SLIM IP44 WW 0043241

Lamp meegeleverd

INTEGRATED LED

### DATA TABLE

#### General data

Artikelnummer	0043241
Productnaam	SYLMIRROR LED SLIM IP44 WW
Technologie	LED
Housing	Aluminum
Montage	Wall/Cabinet
Type armatuur (open/gesloten)	Enclosed
Algemene toepassing	Residential & Consumer,
Operating temperature range (°C)	-10 ~ +45
Certificeringen	EUNEW009
ETIM Class	EC002892
E-nummer FI	4170557
E-nummer SE	7505163

#### Optical data

Fixture luminous flux (lm)	560
Luminaire efficacy (lm/W)	70
LOR (%)	100
Kleurtemperatuur (K)	3000
Lichtkleur	Warm White
CRI (Ra)	80
Initiële kleurvariatie (SDCM)	6
Photobiological Risk Group	RG0

#### Electrical data

Totaal energieverbruik (W)	8
Netspanning (V)	220-240V~
Electrical protection	Class II
Voorschakelapparaat vereist	No
Type ballast	Electronic (constant current)
Dimmable	No
Drive current (mA)	60
Inrush Current (A)	2
Inrush Duration (µs)	50
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	100
Max. Luminaires per 16A C Breaker	200

#### Lifetime data

Lumen maintenance - L70 B50	25000
Gemiddelde levensduur (nominaal) (u)	25000

#### Physical data

## SylMirror SYLMIRROR LED SLIM IP44 WW 0043241

Kleur behuizing	Chrome
IP waarde	IP44
IK waarde	IK03
Diffuser materiaal	PC
Lengte (mm)	400
Breedte (mm)	120
Nominal Product Height (mm)	45
Gewicht (kg)	0.206

### Packaging


Beschrijving verpakking	Carton
EAN code	5410288432410
Enkele lengte verpakking (cm)	41.0
Enkele breedte verpakking (cm)	13.2
Hoogte eenheidsverpakking (cm)	5.5
DUN14 (outer)	15410288432417
Units per outer package	6
Packaging outer length / height (cm)	43.0
Packaging outer width (cm)	42.0
Packaging outer depth (cm)	13.5

## PHOTOMETRY


Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.37 1.30	E(0°) 866 E(C90) 82 E(C0) 89
1.0	2.74 2.60	E(0°) 217 E(C90) 203 E(C0) 221
1.5	4.11 3.90	E(0°) 96 E(C90) 70 E(C0) 111
2.0	5.49 5.19	E(0°) 54 E(C90) 39 E(C0) 66
2.5	6.86 6.49	E(0°) 35 E(C90) 24 E(C0) 44
3.0	8.23 7.79	E(0°) 24 E(C90) 17 E(C0) 33

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 104.6°)  
— C90 - C270 (Half beam angle: 107.6°)

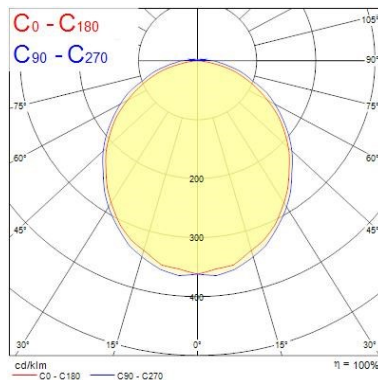


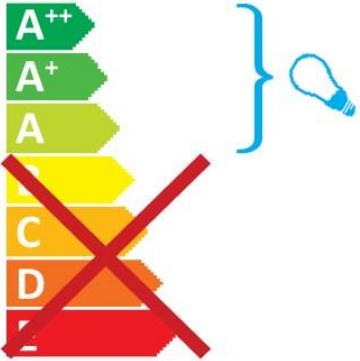
## TECHNICAL DRAWINGS




## SylMirror SYLMIRROR LED SLIM IP44 WW 0043241


**SYLVANIA** 0043241

 This luminaire contains built in LED lamps.





The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

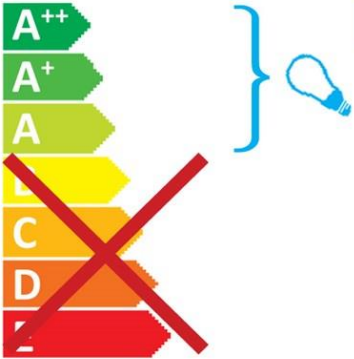

**SYLVANIA** 0043241  874/2012