

START Waterproof Tubular IP66

START Waterproof Tubular 1500 IP66 7400lm 840 PC

0047181

Product features



- START Waterproof Tubular is an aesthetically attractive integrated LED fixture. Easy to install with 304 stainless steel fixing brackets for ceiling mounting. Polycarbonate housing; 4000K; 50W; 7400lm; High efficiency with 148lm/W and lumen maintenance L70:B50 of 54,000 hours lifetime. IP66; IK10; Class I; 1495mm x 70mm. Can be suspended with additional accessory (SKU 0046035).



NOTES

undefined

PRODUCT OVERVIEW

IPC Code	0047181
Product name	START Waterproof Tubular 1500 IP66 7400lm 840 PC
Technology	LED
General application	Logistics & Industry
ETIM Class	EC000109
E-number FI	4309099
Fixture luminous flux (lm)	7400
Luminaire efficacy (lm/W)	148
Colour temperature (K)	4000
CRI (Ra)	80
Photobiological Risk Group	RG1
Total power consumption (W)	50
Electrical protection	Class I
Dimmable	No
IP rating	IP66
IK rating	IK10
Product EAN number	5410288471815

DATA TABLE

General data

IPC Code	0047181
Product name	START Waterproof Tubular 1500 IP66 7400lm 840 PC
Technology	LED
General application	Logistics & Industry
Operating temperature range (°C)	-25°C - 50°C
ETIM Class	EC000109
E-number FI	4309099

START Waterproof Tubular IP66

START Waterproof Tubular 1500 IP66 7400lm 840 PC

0047181

Optical data

Fixture luminous flux (lm)	7400
Luminaire efficacy (lm/W)	148
Colour temperature (K)	4000
CRI (Ra)	80
Beam angle (Rated) (°)	120
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	50
Mains voltage (V)	220-240V~
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	10
Electrical protection	Class I
Dimmable	No
Drive current (mA)	250
Inrush Current (A)	40
Inrush Duration (µs)	100
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	14
Max. Luminaires per 13A C Breaker	18
Max. Luminaires per 16A C Breaker	22
Max. Luminaires per 20A C Breaker	28
Max. Luminaires per 10A B Breaker	8
Max. Luminaires per 13A B Breaker	10
Max. Luminaires per 16A B Breaker	13
Max. Luminaires per 20A B Breaker	16

Lifetime data

Lumen maintenance - L70 B50	54000
Lumen maintenance - L80 B50	54000

Physical data

IP rating	IP66
IK rating	IK10
Nominal Product Length (mm)	1495
Nominal Product Width (mm)	70
Nominal Product Height (mm)	70
Weight (kg)	3.1

Packaging


Single packaging type	Carton
Product EAN number	5410288471815
Packaging single length / height (cm)	163.5
Packaging single width (cm)	10.5
Packaging single depth (cm)	10.5
DUN14 (outer)	15410288471812

START Waterproof Tubular IP66

START Waterproof Tubular 1500 IP66 7400lm 840 PC
0047181

Units per outer package	2
Packaging outer length / height (cm)	165.0
Packaging outer width (cm)	23.0
Packaging outer depth (cm)	23.0

PHOTOMETRY

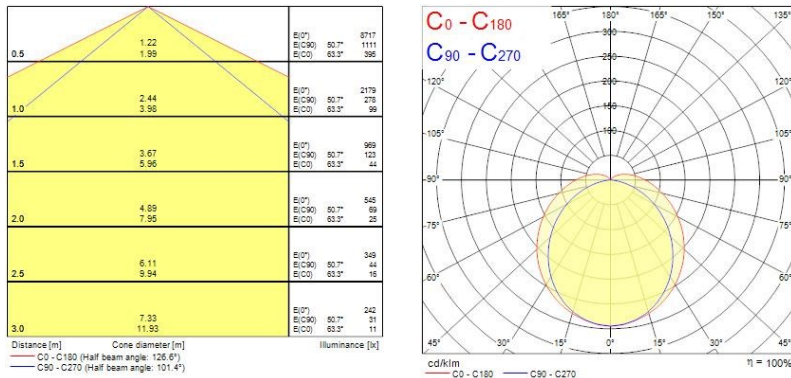

TECHNICAL DRAWINGS





START Waterproof Tubular IP66

START Waterproof Tubular 1500 IP66 7400lm 840 PC


0047181


SYLVANIA 0047181


 This luminaire contains built-in LED lamps

 } LED


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built-in LED lamps

 } LED

The lamps cannot be changed in the luminaire.

SYLVANIA 0047181 

874/2012