

# PRODUCT DATASHEET

## SPOT ADJUST 6 W 3000 K WT

SPOT ADJUST | Recessed mounted spotlight, adjustable, round shape



---

### AREAS OF APPLICATION

- Replacement of halogen lamp spotlights
- General illumination
- Hotel rooms
- Bars, restaurants
- Accent lighting
- Galleries, museums
- Residential interiors

---

### PRODUCT BENEFITS

- High luminous efficacy
- Design matches the LEDVANCE DOWNLIGHT luminaire family
- Energy savings of up to 90 % compared to halogen lamp spotlights
- Functional and minimalistic design
- Easy and quick installation
- External driver for extended flexibility (compatible with selected DALI drivers)
- 3 years guarantee

---

### PRODUCT FEATURES

- Initial color consistency:  $\leq 4$  SDCM
- Housing material: aluminum
- Lens material: PMMA



**TECHNICAL DATA**

Electrical data

Nominal wattage	6.50 W
Operating mode	Electronic control gear (ECG)
Nominal voltage	220...240 V
Power factor $\lambda$	>0.90
Mains frequency	50/60 Hz


Photometrical data

Color temperature	3000 K
Luminous flux	550 lm
Luminous efficacy	85 lm/W
Standard deviation of color matching	$\leq 4$ sdc <sub>m</sub>
Light color (designation)	Warm White
Color rendering index Ra	>80

Light technical data

Beam angle	36 °
------------	------

Dimensions & weight



Diameter	80.0 mm
Height	36.0 mm
Product weight	189.00 g
Mounting diameter	68 mm

Colors & materials

Body material	Aluminum
Housing color	White
Product color	White

## Temperatures &amp; operating conditions

<b>Ambient temperature range</b>	-20...45 °C
----------------------------------	-------------

## Lifespan

<b>Lifespan L70 at 25 °C</b>	50000 h
<b>Lifespan L80 at 25 °C</b>	40000 h
<b>Lifespan L90 at 25 °C</b>	20000 h

## Additional product data

<b>Mounting type</b>	Recessed
<b>Mounting location</b>	Ceiling



## Capabilities

<b>Adjustable</b>	Yes
<b>Dimmable</b>	No
<b>Type of connection</b>	Terminal, 2-pin

## Certificates &amp; standards

<b>Protection class IK (shock resistance)</b>	IK06
<b>Photobiological safety group</b>	RG 0
<b>Protection class</b>	II
<b>Type of protection</b>	IP20
<b>Standards</b>	CE/CB/TÜV SÜD/EAC/RoHS

Light Distribution

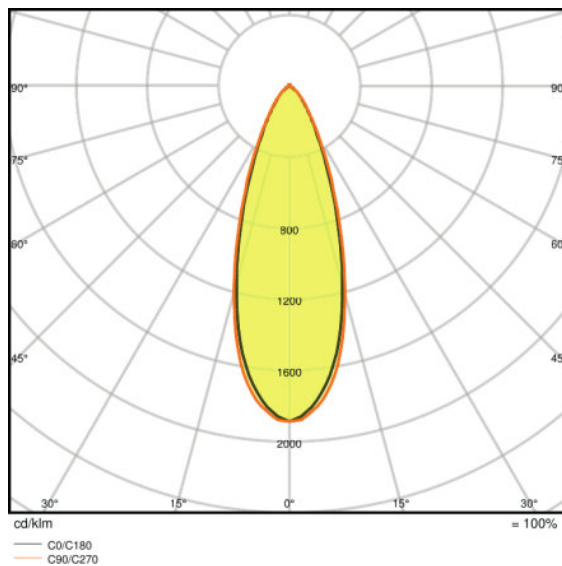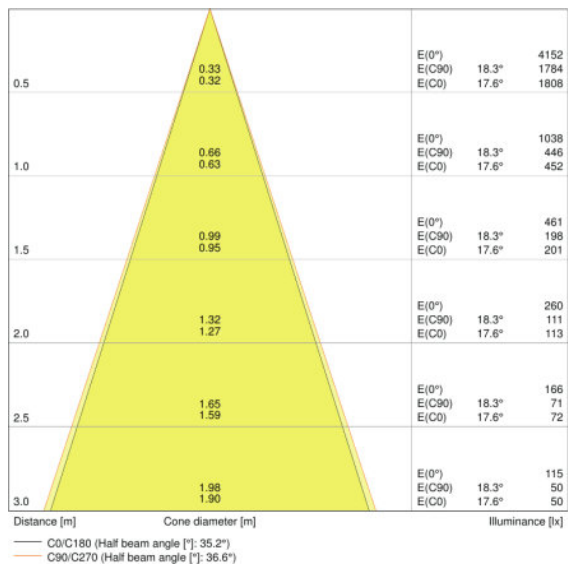

LDC typ cone

LDC typ polar

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075126909	SPOT ADJUST 6 W 3000 K WT	Shipping carton box 30	575 mm x 230 mm x 225 mm	29.76 dm <sup>3</sup>	8195.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see  
 ▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.