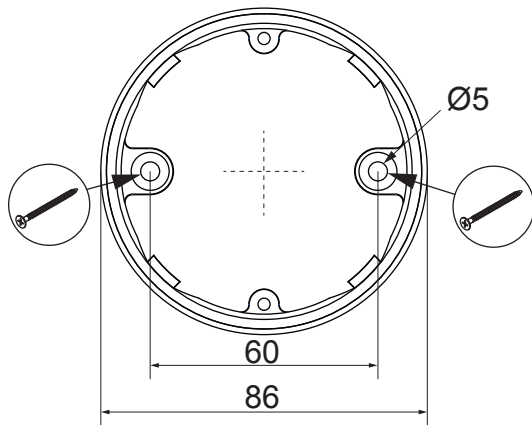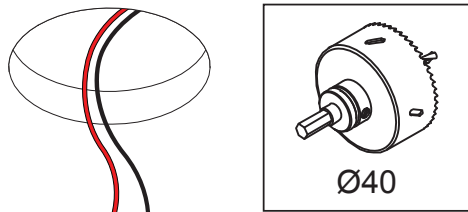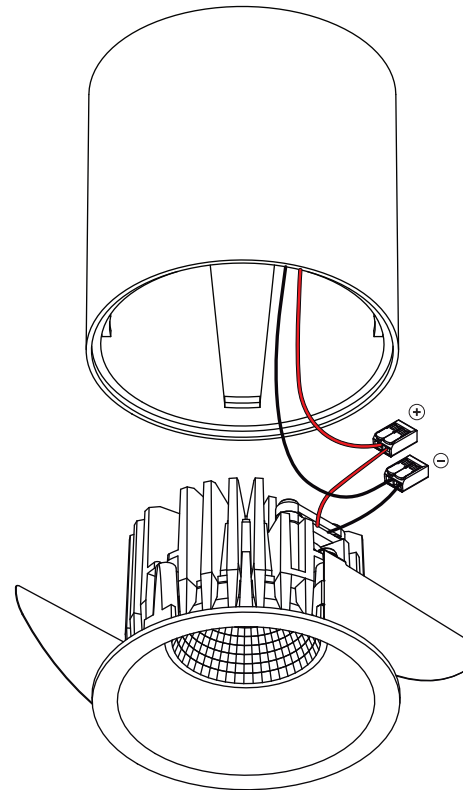# Smart surface tubed 82 small LED GE

128410XX

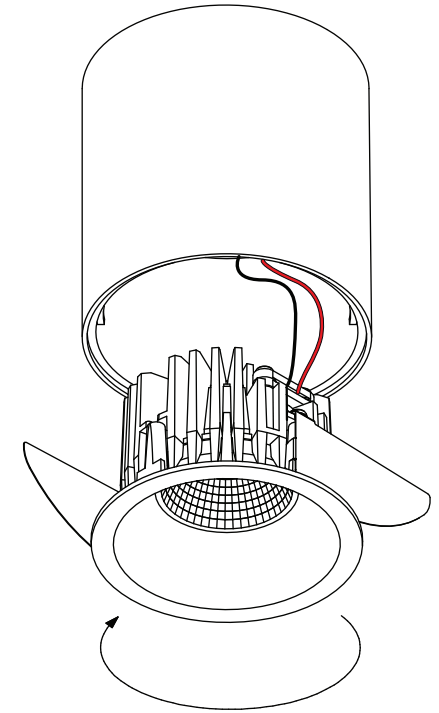VISUALIZATION WITH *'SMART LOTIS'* READ 'CAN BE USED WITH' FOR ALL OTHER USEFUL *'SMART'* PRODUCTS *'SMART 82 GE'* FIXTURE NOT INCLUDED

Ø40

+
-

Ø5

60

86

8mm

□0,08 - 2,5mm²

IP54 only when used with included silicone ring and in closed ceiling
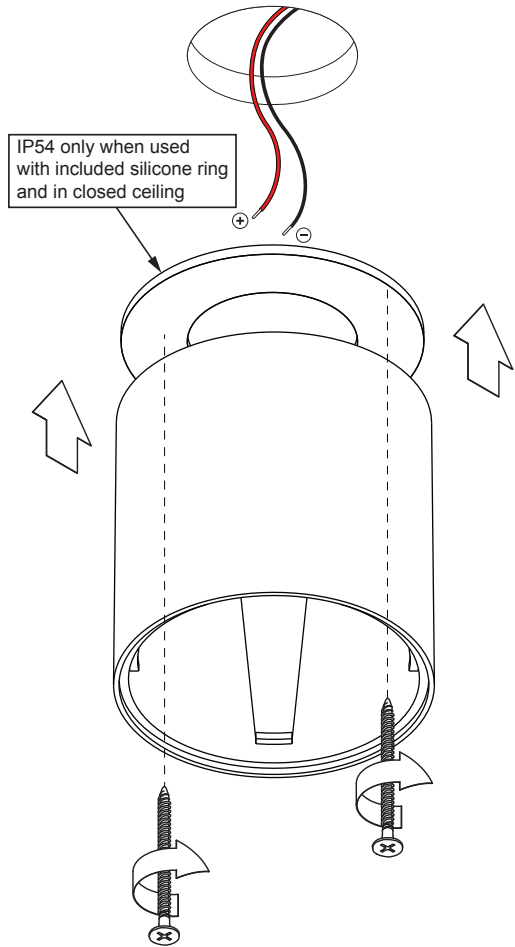
(SCREWS NOT INCLUDED)

350mA - min 16,5Vf - max 19,2Vf - 6,2W
500mA - min 17,1Vf - max 19,8Vf - 9,2W

install : Twist clockwise
uninstall : Twist counterclockwise

CAN BE USED WITH

12411XXX - Smart Cake 82 LED GE
12412XXX - Smart Cake 82 IP54 LED GE*
12441XXX - Smart Lotis 82 LED GE
12442XXX - Smart Lotis 82 IP54 LED GE*
12471XXX - Smart Kup 82 LED GE
12472XXX - Smart Kup 82 IP54 LED GE*

*Use included silicone ring to retain IP54 rating

500mA   IP 54

V3 - 25/02/2016