





Smart surface tubed 82 large LED GE

128450XX

A With smart 82 LED retrofit GU10

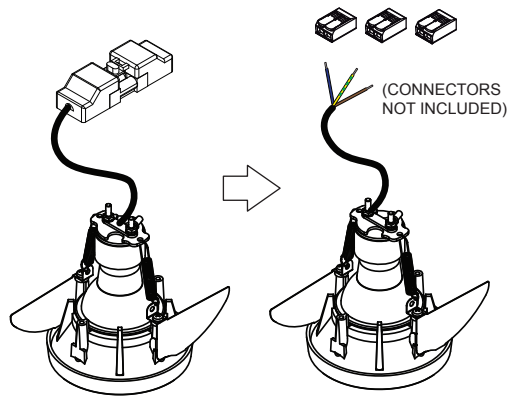


CHANGE CONNECTOR TYPE
MOUNTED ON ES50 LAMP

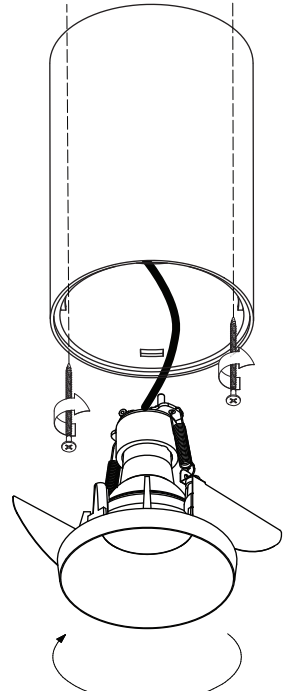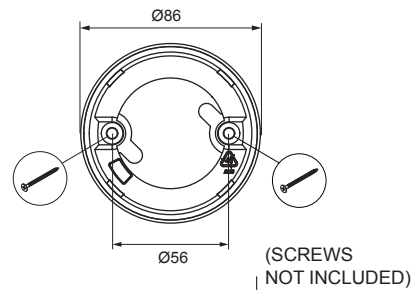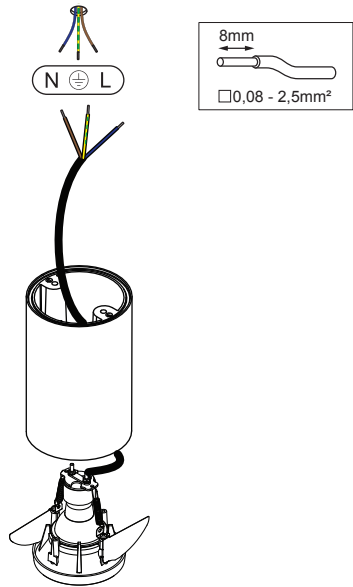


install : Twist clockwise
uninstall : Twist counterclockwise

even combined with included O-ring
fixture remains IP20


B With smart 82 LED GE

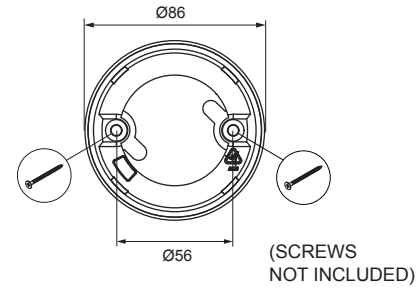

350mA - min 16,5Vf - max 19,2Vf - 6,2W
500mA - min 17,1Vf - max 19,8Vf - 9,2W
700mA - min 17,7Vf - max 20,8Vf - 13,4W

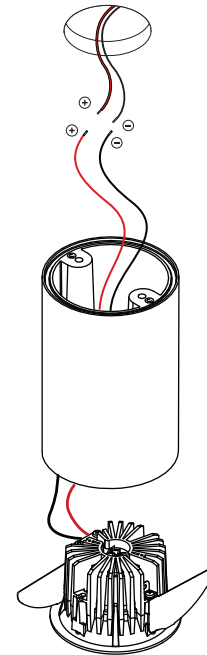

IP54 only when used with included O-ring
and combined with 'Smart 82 IP54' fixture

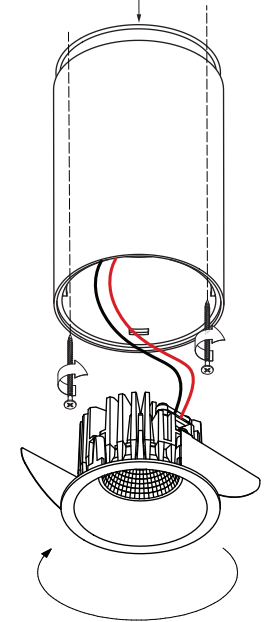

install : Twist clockwise
uninstall : Twist counterclockwise

CAN BE USED WITH

- 12411XXX - Smart Cake 82 LED GE
- 12412XXX - Smart Cake 82 IP54 LED GE*
- 124201XX - Smart Cake 82 LED GU10
- 12441XXX - Smart Lotis 82 LED GE
- 12442XXX - Smart Lotis 82 IP54 LED GE*
- 124501XX - Smart Lotis 82 LED GU10
- 12471XXX - Smart Kup 82 LED GE
- 12472XXX - Smart Kup 82 IP54 LED GE*
- 124801XX - Smart Kup 82 LED GU10

*Use included O-ring to retain IP54 rating



V0 - 05/11/2015