




# Smart Cake 82 LED Warm Dim GE

124130XX\_124131XX\_124132XX

1




2




Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	31	36	12

For serial connection, respect polarity!



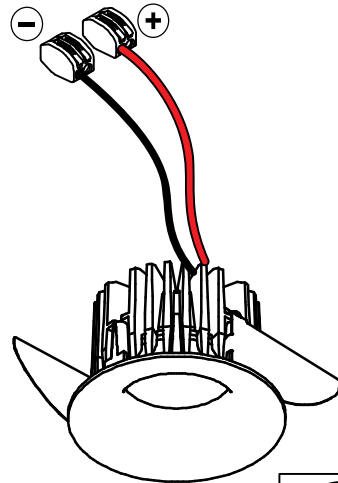


3

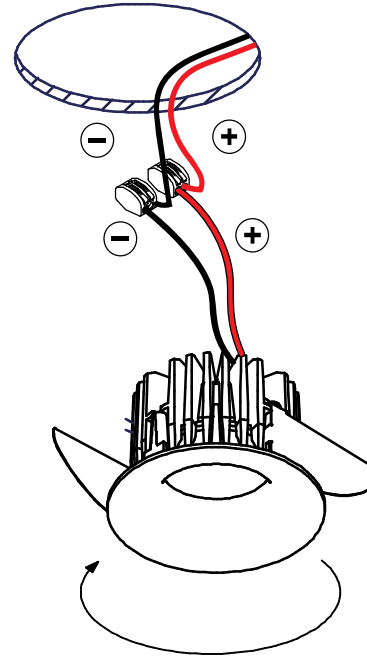

install : Twist clockwise  
uninstall : Twist counterclockwise

4

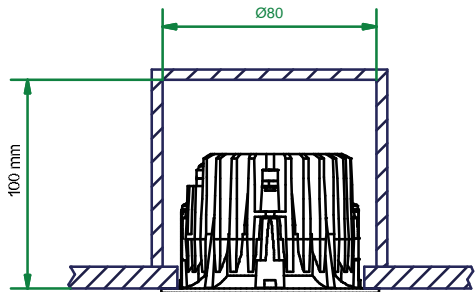

## CAN BE USED WITH

**Drivers:**  
see driver matrix - latest version on website  
[www.supermodular.com](http://www.supermodular.com) or check sales contact

**Recessed ring:**  
12500230 Recessed ring Ø70 H100

**Surface box:**  
125160XX Smart SBS 82 GE for LED  
125161XX Smart SBD 82 GE for 2xLED

**Gypkit - conbox**  
12290130 Gypkit 190X190X Ø70  
10889830 Conbox outer dim. 190x192x130

**Mask:**  
12500009 Smart Mask 82 1x WhStr  
12500032 Smart Mask 82 1x BiStr  
12500046 Smart Mask 82 1x Gold  
12500109 Smart Mask 82 2Lx WhStr  
12500132 Smart Mask 82 2Lx BiStr  
12500146 Smart Mask 82 2Lx Gold

