

SPHERE I (E14)

SKU: SPHR-G50-4W-2000/2800K-E14-MP

tala

3.8 WATT | 220 LUMENS | 2000K TO 2800K

Decorative, dim to warm LED lightbulb. This lamp uses 3.8 Watts of power and achieves 220 Lumens at a CRI of 95. It has an IP54 rating.

DIM TO WARM
TECHNOLOGY



LAMP

Shape: G50
Materials: Soda-lime Glass and Brass Cap
Finish: Matte White
Beam angle: 360°
Base: E14
Weight: 17g
Working temperature: -5°C to 40°C
Warm up time: Instant
Warranty: 3 years
Input Voltage: 220-240V, 50/60Hz



BULB DIMENSIONS

50 x 82 mm
(Width x Length)

PERFORMANCE


CRI (colour rendering index)	95
Lamp lumen output	220lm
Flicker	<5%
Lumens per circuit watt (LM/W)	58lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2000K - 2800K
Power factor	0.9

DIMMING

Dimmable: Yes
Dimming type: Leading or trailing edge dimmer
Recommended EU Dimmer: Varilight - V-pro

A full list of compatible dimmers is available on our website:
www.tala.co.uk/recommended-dimmers/

POLAR DIAGRAM

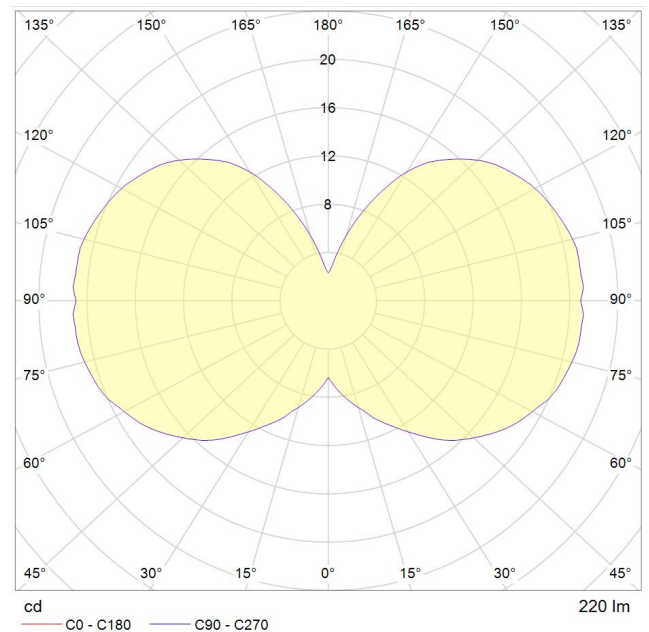

IES/LDT FILE

Available upon request.

EAN UK: 5060400152902



SPHERE I (E27)

SKU: SPHR-G50-4W-2000/2800K-E27-MP

tala

3.8 WATT | 220 LUMENS | 2000K TO 2800K

DIM TO WARM
TECHNOLOGY

Decorative, dim to warm LED lightbulb. This lamp uses 3.8 Watts of power and achieves 220 Lumens at a CRI of 95. It has an IP54 rating.



LAMP

Shape: G50
Materials: Soda-lime Glass and Brass Cap
Finish: Matte White
Beam angle: 360°
Base: E27
Weight: 23g
Working temperature: -5°C to 40°C
Warm up time: Instant
Warranty: 3 years
Input Voltage: 220-240V, 50/60Hz

BULB DIMENSIONS

50 x 84 mm
(Width x Length)




PERFORMANCE

CRI (colour rendering index)	95
Lamp lumen output	252lm
Flicker	<5%
Lumens per circuit watt (LM/W)	58lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2000K - 2800K
Power factor	0.9

DIMMING

Dimmable: Yes
Dimming type: Leading or trailing edge dimmer
Recommended EU Dimmer: Varilight - V-pro
A full list of compatible dimmers is available on our website:
www.tala.co.uk/recommended-dimmers/

POLAR DIAGRAM

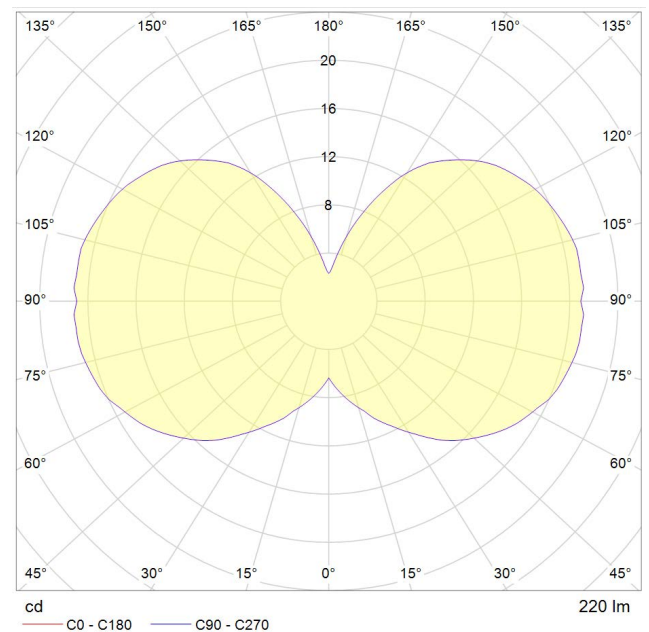

IES/LDT FILE

Available upon request.

EAN UK: 5060400152926



SPHERE II

SKU: SPHR-G75-6W-2000/2800K-E27-MP

tala

6 WATT | 480 LUMENS | 2000K TO 2800K

DIM TO WARM
TECHNOLOGY

Decorative, dim to warm LED light bulb. This lamp uses 6 Watts of power and achieves 480 Lumens at a CRI of 95. It has an IP54 rating.



LAMP

Shape: G75
Materials: Borosilicate Glass and Brass Cap
Finish: Matte White
Beam angle: 360°
Base: E27
Weight: 82g
Working temperature: -5°C to 40°C
Warm up time: Instant
Warranty: 3 years
Input Voltage: 220-240V, 50/60Hz



BULB DIMENSIONS

75 x 112 mm
(Width x Length)


PERFORMANCE

CRI (colour rendering index)	95
Lamp lumen output	480lm
Flicker	<5%
Lumens per circuit watt (LM/W)	80lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2000K - 2800K
Power factor	0.9

DIMMING

Dimmable: Yes
Dimming type: Leading or trailing edge dimmer
Recommended EU Dimmer: Varilight - V-pro
A full list of compatible dimmers is available on our website:
www.tala.co.uk/recommended-dimmers/

POLAR DIAGRAM

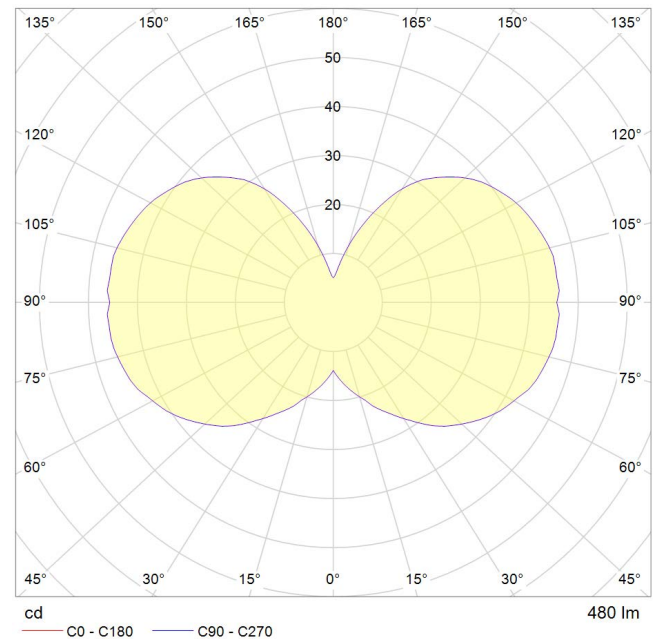

IES/LDT FILE

Available upon request.

EAN UK:5060400152940



SPHERE III

SKU: SPHR-G100-7W-2000/2800K-E27-MP

tala®

7 WATT | 600 LUMENS | 2000K TO 2800K

DIM TO WARM
TECHNOLOGY

Decorative, dim to warm LED light bulb. This lamp uses 7 Watts of power and achieves 600 Lumens at a CRI of 95. It has an IP54 rating.



LAMP

Shape: G100
Materials: Borosilicate Glass and Brass Cap
Finish: Matte White
Beam angle: 360°
Base: E27
Weight: 116g
Working temperature: -5°C to 40°C
Warm up time: Instant
Warranty: 3 years
Input Voltage: 220-240V, 50/60Hz



BULB DIMENSIONS

100 x 137 mm
(Width x Length)


PERFORMANCE

CRI (colour rendering index)	95
Lamp lumen output	600lm
Flicker	<5%
Lumens per circuit watt (LM/W)	86lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2000K - 2800K
Power factor	0.9

DIMMING

Dimmable: Yes
Dimming type: Leading or trailing edge dimmer
Recommended EU Dimmer: Varilight - V-pro
A full list of compatible dimmers is available on our website:
www.tala.co.uk/recommended-dimmers/

POLAR DIAGRAM

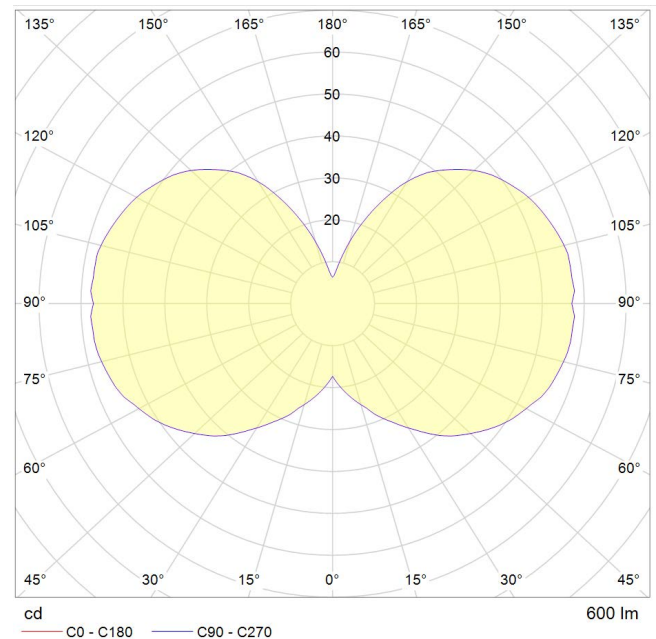

IES/LDT FILE

Available upon request.

EAN UK: 5060400152858



SPHERE IV

SKU: SPHR-G150-8W-2000/2800K-E27-MP

tala®

8 WATT | 680 LUMENS | 2000K TO 2800K

DIM TO WARM
TECHNOLOGY

Decorative, dim to warm LED lightbulb. This lamp uses 8 Watts of power and achieves 680 Lumens at a CRI of 95. It has an IP54 rating.



LAMP

Shape: G150
Materials: Borosilicate Glass and Brass Cap
Finish: Matte White
Beam angle: 360°
Base: E27
Weight: 180g
Working temperature: -5°C to 40°C
Warm up time: Instant
Warranty: 3 years
Input Voltage: 220-240V, 50/60Hz




BULB DIMENSIONS

150 x 190 mm
(Width x Length)

PERFORMANCE

CRI (colour rendering index)	95
Lamp lumen output	680lm
Flicker	<5%
Lumens per circuit watt (LM/W)	85lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2000K - 2800K
Power factor	0.9

POLAR DIAGRAM

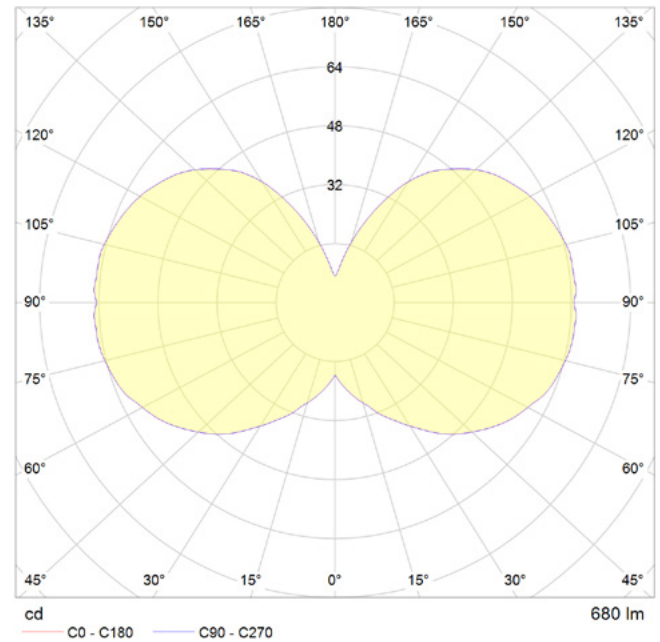

DIMMING

Dimmable: Yes
Dimming type: Leading or trailing edge dimmer
Recommended EU Dimmer: Varilight - V-pro
A full list of compatible dimmers is available on our website:
www.tala.co.uk/recommended-dimmers/

IES/LDT FILE

Available upon request.

EAN UK: 5060400152889

