


## START DOWNLIGHT IP44 175

START Downlight 175 IP44 1425lm 830  
0030326



### Product features

- Ceiling recessed LED downlight IP44 (from the front), perfect where limited ceiling void is available with only 55mm product depth and 175mm cutout. Ideal replacement for 1x32W/2x18W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 1425LM, 15W, 95lm/W, 3000K, Driver Current: 390mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP44 from the front, IK07, (HxW) 55x195mm, Class 2, 220-240V

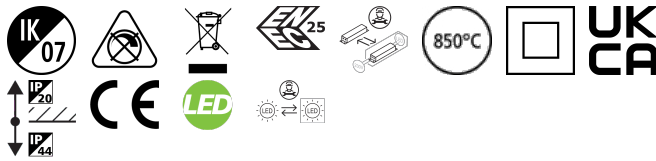

### PRODUCT OVERVIEW

Product name	START Downlight 175 IP44 1425lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278147
Warranty	5 years
Fixture luminous flux (lm)	1425
Luminous flux (lm)	1425
Luminaire efficacy (lm/W)	95
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	15
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303260
Dimming method	N/A

## START DOWNLIGHT IP44 175

*START Downlight 175 IP44 1425lm 830*  
0030326

### DATA TABLE

#### General data

Product name	START Downlight 175 IP44 1425lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
Operating temperature range (°C)	-10°C - 40°C
Performance ambient temperature Tq (°C)	40
ETIM Class	EC001744
E-number FI	4278147
Warranty	5 years

#### Optical data

Fixture luminous flux (lm)	1425
Luminous flux (lm)	1425
Luminaire efficacy (lm/W)	95
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Beam Angle (°)	74
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0

#### Electrical data

Total power consumption (W)	15
Mains voltage (V)	220-240V
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>100000
Transformer required	No
Dimmable	No
Drive current (mA)	390
Inrush Current (A)	7.52
Inrush Duration (µs)	830
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E

## START DOWNLIGHT IP44 175

START Downlight 175 IP44 1425lm 830

0030326

Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	22
Max. Luminaires per 13A C Breaker	27
Max. Luminaires per 16A C Breaker	34
Max. Luminaires per 20A C Breaker	42
Max. Luminaires per 10A B Breaker	13
Max. Luminaires per 13A B Breaker	16
Max. Luminaires per 16A B Breaker	20
Max. Luminaires per 20A B Breaker	25

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	74000
Lifespan L90 B10	34000

### Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Height (mm)	55
Nominal Product Diameter (mm)	195
Cutout Dimensions (W x L in mm or Diameter in mm)	175
Weight (kg)	0.371
Recessed Depth (mm)	150

### Packaging

Single packaging type	Carton
Product EAN number	5410288303260
Packaging single length / height (cm)	20.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	6.8
DUN14 (outer)	15410288303267
Units per outer package	16
Packaging outer length / height (cm)	56.8
Packaging outer width (cm)	42.0
Packaging outer depth (cm)	22.5


### Safety data

Optimal operating condition (°C)	-10-40
----------------------------------	--------

## PHOTOMETRY

## START DOWNLIGHT IP44 175

START Downlight 175 IP44 1425lm 830  
0030326

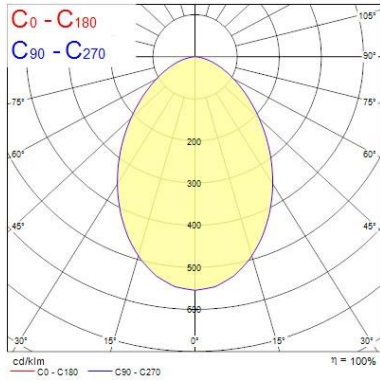

0.5	0.81	E(D) E(C0)	3141 738
1.0	1.63	E(D) E(C0)	785 184
1.5	2.44	E(D) E(C0)	349 82
2.0	3.25	E(D) E(C0)	196 46
2.5	4.06	E(D) E(C0)	128 29
3.0	4.88	E(D) E(C0)	87 21

Distance [m]      Cone diameter [m]      Illuminance [lx]  
C0 - C180 (Half beam angle: 78.2°)

## TECHNICAL DRAWINGS

