

BEGA**33 338**

Ceiling, wall and pillar luminaire



Project · Reference number

Date

Product data sheet

Application

Shielded ceiling, wall and pillar luminaire with high protection class for a variety of lighting tasks.

A luminaire made of die cast aluminium and impact resistant crystal glass.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel

Crystal glass coated

2 fixing holes \varnothing 5.5 mm

144 mm spacing

2 cable entries for through-wiring of mains supply cable \varnothing 7 - 10,5 mm, max. 3 G 1.5[□]

Connecting terminal 2.5[□]

Earth conductor connection

Lampholder GX 24 q-2

Electronic ballast (EEI=A2 BAT)

220-240 V \sim 0/50-60 Hz

DC 176-264 V

DC Start \geq 198 V

Safety class I

Protection class IP 65

Dust-tight and protection against water jets

Impact strength IK08


Protection against mechanical

impacts < 5 joule

– Safety mark

CE – Conformity mark

Weight: 2.6 kg

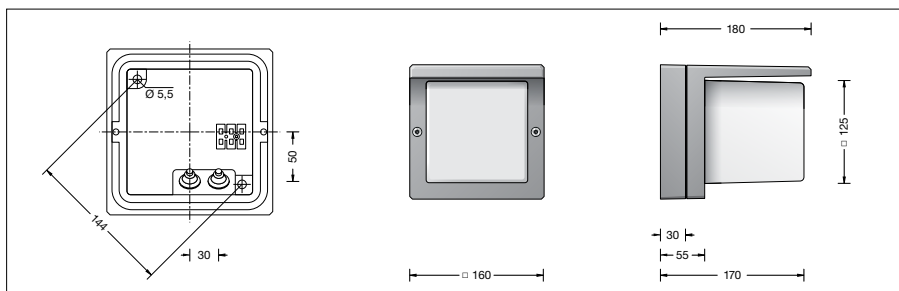

Lamp

Compact fluorescent lamp
TC-TELI 18 W · GX 24 q-2

Osram: Dulux T/E 18 W 1200 lm
Philips: PL-T TOP 18 W / 4p 1200 lm

Please note the lamp manufacturers' operating instructions.

Article No. 33 338

Colour graphite or silver
graphite – article number
silver – article number + **A**