


SOMMAIRE

Page

1. General characteristics	1
2. Range.....	1
3. Technical data.....	2
4. Dimensions.....	3
5. Equipment	5
6. Accessories.....	11

1. GENERAL CHARACTERISTICS

- Steel cabinets coated with 80 µm textured polyester.
- RAL 7035
- IP 55 (2 doors), IP 66 (1 door) to standard IEC EN 62262 (EN 50102).
- IK 10
- Approval :  US LISTED
- Heights (mm): 300/400/500/600/700/800/1000/1200/1400.
- Widths (mm): 200/300/400/500/600/800/1000/1200.
- Depths (mm): 160/200/250/300/400.
- Dimensions: vertical, square, horizontal.
- Reversible doors. Hinges and pins with high performance anti-corrosion treatment.
- Twin bar bolt.
- Supplied with plain plates.
- Direct fixing of equipment in base of cabinet (self centering of equipment).
- Optional adjustment of equipment from size 600 mm high x 600 mm wide and 250 mm deep.
- Lower cable entry plate with symmetrical fixing, except depth 160 mm.
- Reinforced protection with top plate.
- Cabinets fix with feet, on a plinth or on a mounting frame.
- Polyurethane door seal.
- Transparent door with viewing window in tinted tempered glass.
- EMC attenuation 20 dB.

2. RANGE

RAL 7035 Cabinets

• Vertical version (external dimensions in mm)

Cat. No.	Height	Width	Depth	Number of doors	Weight (Kg)
0 369 10 ⁽¹⁾	300	200	160	1	3.6
0 369 12 ⁽¹⁾	400	300		1	6
0 369 13 ⁽¹⁾	500	400		1	10.2
0 369 17	400	300	200	1	6.7
0 369 18	500	400		1	11
0 369 19	600			1	12.5
0 369 20		500		1	16.1
0 369 21	700	500	1	19.7	
0 369 25	500	400	250	1	12.9
0 369 26	600			1	13.5
0 369 30	700	500		1	23.2
0 369 31	800	600		1	30.2
0 369 32	1000		800	1	40.4
0 369 33		800	1	49.5	
0 369 37	800	600	300	1	31.7
0 369 38	1000			800	1
0 369 39		600		1	52
0 369 42	1200	800		1	46.4
0 369 43		600	1	61.9	
0 369 44	800	600	400	1	37.8
0 369 45	1000			1	57.1
0 369 46	1200			1	67
0 369 50	1400			1	74.8

(1) No opening

2. RANGE (CONTINUED)

RAL 7035 cabinets (continued)

• Square version (external dimensions in mm)

Cat. No.	Height	Width	Depth	Number of doors	Weight (Kg)
0 369 51 ⁽¹⁾	300	300	160	1	4.7
0 369 55			200		5.5
0 369 57	400	400	200		8.6
0 369 59	500	500	200		13.4
0 369 62			250		13.6
0 369 64	600	600	300		22.3
0 369 68	800	800	300		43.3
0 369 72	600	600	400		29

(1) No opening

• Horizontal version (external dimensions in mm)

Cat. No.	Height	Width	Depth	Number of doors	Weight (Kg)
0 369 11 ⁽¹⁾	300	400	160	1	6
0 369 75			200		6.9
0 369 76	400	600	250		12.5
0 369 77			250		14
0 369 78	600	800	300	2	33.7
0 369 79		1000			41.7
0 369 80	800	53.9			
0 369 81	1000	1200		78.5	

(1) No opening

• With transparent door (external dimensions in mm)

Tinted tempered glass

Vertical version						Window dimensions (mm)	
Cat. No.	Height	Width	Depth	Nbr of doors	Weight (Kg)	Height	Width
0 369 27	400	300	200	1	5.7	300	128
0 369 28	500	400		1	8.4	400	228
0 369 29	600			1	9.8	500	128
0 369 36		1	10.6	228			
0 369 40	700	500	250	1	18.6	600	328
0 369 41	800	600	300	1	23.1	700	428
0 369 47				1	23.5		
0 369 48	1000	800		1	31.9	850	628
0 369 49				1	38.2		
0 369 56	1200	800	400	1	48.7	960	628
0 369 60	1400			1	53.7		
Square version							
0 369 74	600	600	250	1	17.2	500	428

3. TECHNICAL DATA

■ 3.1 Structure

Steel.

Body: thickness 1.3 mm.

Base (H x W): thickness 0.8 for ≤ 600 x 400 cabinets and 1.3 for ≥ 600 x 600 cabinets.

The overall dimensions of cabinets correspond to the stated dimensions for each cabinet catalogue number.

E.g.: 300 x 200 x 160 are the actual dimensions of the cabinet.

■ 3.2 Door

Steel.

Thickness: 1.2 to 1.8 mm depending on size.

■ 3.3 Protection ratings

- IP 55 (2 doors) in accordance with IEC EN 60529.

Protected against water jets from any direction.

- IP 66 (1 door) in accordance with IEC EN.

Completely protected against dust and completely protected against strong jets of water, e.g. for use on ship decks.

- IK 10 in accordance with IEC EN 62262 (EN 50102).

Nema 4x (1 door), Nema 12 (2 doors).

■ 3.4 Mechanical strength

- Max load: 500 kg/m³.

- Max load on door: 5 kg per 100 mm of height.

- Max static load on set of 4 fixing feet:

Cat. No. 0 364 01/04: 300 kg.

- Fixing on a frame, Cat. No. 0 364 36/37 in accordance with EN 50125-3.

(Railway applications, fixed installations).

■ 3.5 Resistance to climatic conditions

- Excellent resistance to UV rays - ISO 4892-2 500-hour method.

- Salt spray to ISO 9227, EN 60068-2-11: 1,000 hours.

- Sulphur dioxide SO₂ with condensation ISO 6988: 500 hours.

- Degree of rusting after RI 1 test ISO 4628/1.

- Operating temperature: - 25° C to + 70° C (+ 100° C peak).

■ 3.6 Fire resistance

- Resistance to glow wire in accordance with IEC EN 60695-2-11: 960°C.

■ 3.7 Properties of the polyester coating

• Polyester-coated steel

Application of a coating of pure polyester to a thickness of 80 µm, using electrostatic powder coating.

Coating resistance according to tests

Mechanical characteristics:

- Adhesion to EN ISO 2409: class 0 to 1.

- Cylindrical mandrel bending to EN ISO 1519: 6 mm with no flaw.

- Cupping to EN ISO 1520: 8 mm

- Impact resistance to EN ISO 6272-1: 1 kg - 50 cm

Coating process

Main stages of the process:

- Phosphation: the layer of iron phosphate improves the adhesion of the coating.

- Neutralisation

- Passivation

- Neutralisation

• Touch-up work on the polyester

Painting aerosol:

0 365 97 RAL 7035

0 365 98 RAL 7032

Touch-up brushes:

Allows protection of the sheet steel after cutting.

0 365 91 RAL 7035

Other colours on request.

3. TECHNICAL DATA (CONTINUED)

■ **3.8 Resistance to chemical agents**

Resistance at ambient temperature in relation to the risk of exposure to spray.

Aqueous solutions	Cold water	++	
	Hot water	+	
	Steam	-	
	5% salt water	+	
	Oxygenated water	-	
	Water + detergent	+	
	Water + surfactants	+	
	Formaldehyde	-	
	Alcohol		
Ethanol	+		
Methanol	+		
Propanol	+		
Butanol	+		
Phenols		-	
Cresols		-	
Bases	Ammonia	+	
	Sodium hydroxide (caustic soda)	+	
	Sodium hypochlorite (12° bleach)	+	
	Potassium hydroxide (potash)	+	
Strong oxidising acids	Concentrated acetic acid	+	
	5% nitric acid	+	
	30% sulphuric acid	+	
	30% hydrochloric acid	+	
	70% perchloric acid	++	
	70% hydrofluoric acid	--	
	50% chromic acid	-	
	30% phosphoric acid	+	
Weak acids	Diluted acetic acid < 25%	+	
	Citric acid	++	
	Lactic acid	++	
	Formic acid	+	
	Uric acid	+	
Oils and greases	Of animal origin	Lard	++
		Butter, cream	++
	Of vegetable origin	Linseed oil	++
		Peanut / Olive	++
		Castor oil	++
		Glycerine	+
	Of mineral origin	Paraffin (vaseline)	++
		Car engine oils	+
		Silicone oils	++
		Cutting oils	++
Hydraulic oils	+		

3. TECHNICAL DATA (CONTINUED)

■ **3.8 Resistance to chemical agents (continued)**

Hydrocarbons	Unleaded petrol	+
	Diesel oil	++
	Kerosene	++
	White spirit	++
Chlorinated solvents	Trichloroethylene	--
	Trichloroethane	-
	Tetrachloroethylene	--
	Methylene chloride	--
	Carbon tetrachloride	--
	Chloroform	-
Aromatic solvents	Benzene	+
	Toluene	-
	Xylene	+
Aliphatic solvents	Hexane	++
	Heptane	++
Fluorinated solvent	Trichlorofluoromethane	--
Ketones	Acetone	-
	Terpenes	-
	Ethyl acetate	-
Terpenes	Turpentine	-

++: Excellent resistance (continuous exposure)



+: Good resistance (sustained exposure)

-: Limited resistance (possible casual exposure)

--: Low resistance (exposure to be avoided)

4. DIMENSIONS

Doors

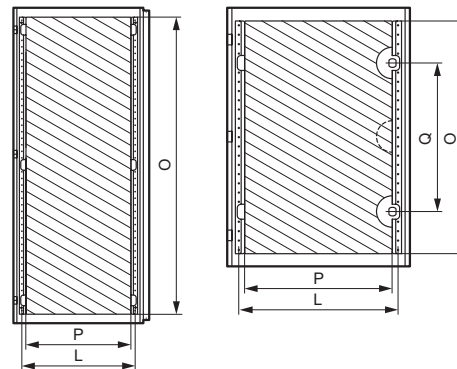


4. DIMENSIONS (CONTINUED)

Doors (continued)

Cat. Nos	Cabinets		Usable door dimensions		Position of bolts	Centre-to-centre spacing between cable carriers
	Height (mm)	Width (mm)	Height O (mm)	Width P (mm)		
0 369 10	300	200	251	148 ⁽³⁾	(1)	(2)
0 369 17/12/27	400	300	351	248 ⁽³⁾	(1)	(2)
0 369 13/18/28	500	400	451	300	(1)	330
0 369 19/26/29/36	600		551		350	
0 369 20	700	500	651	400	400	430
0 369 21/30/40					400	430
0 369 25	500	400	451	300	(1)	330
0 369 31/37/41/44/47	800	600	751	500	500	530
0 369 32/38/48					(1)	
0 369 33/39/45/49	1000	800	951	700	(1)	730
0 369 42	1200	600	1151	500	(1)	530
0 369 43/46/56		800		700	(1)	730
0 369 50/60	1400	800	1351	700	(1)	730
0 369 51/55	300	300	251	248 ⁽³⁾	(1)	(2)
0 369 57	400	400	351	348 ⁽³⁾	(1)	(2)
0 369 59/62	500	500	451	400	(1)	430
0 369 64/72/74	600	600	551	500	350	530
0 369 68	800	800	751	700	500	730
0 369 11/75	300	400	251	348 ⁽³⁾	(1)	(2)
0 369 76/77	400	600	351	500	(1)	530
0 369 78	600	800	551	300 x 2	(1)	330
0 369 79				400 x 2	(1)	430
0 369 80	800	1000	751	400 x 2	(1)	430
0 369 81	1000	1200	951	500 x 2	(1)	530

(1) Central bolt
(2) Without cable carrier
(3) -12 mm on Legrand marking side

Transparent door




• Tinted tempered glass

Vertical version				Window dimensions (mm)	
Cat. No.	Height	Width	Depth	Height	Width
0 369 27	400	300	200	300	128
0 369 28	500	400		200	400
0 369 29	600		400		200
0 369 36		228			
0 369 40	700	500	250	600	328
0 369 41	800	600	250	700	428
0 369 47				800	
0 369 48	1000	800	300	850	628
0 369 49				850	
0 369 56	1200	800	400	960	628
0 369 60	1400			1160	
Square version					
0 369 74	600	600	250	500	428


Usable cabinet depth

Cabinets	On enclosure base	
	W (mm)	X (mm)
Depth (mm)		
160	140	125
200	180	185
250	230	215
300	280	265
400	380	385



Adjustment of equipment (optional)

Cabinets	Slide Cat. No.	With slides			
		W (mm)		X (mm)	
Depth (mm)					
250	0 367 43	93	213	78	198
300	0 367 44	93	263	78	248
400	0 367 45	93	363	78	348




From 600 x 600 mm upwards.



4. DIMENSIONS (CONTINUED)

Cabinet openings

Cabinet width \leq 800 mm




Cabinet width \geq 1000 mm



Cabinets			Window dimensions (mm)		
Width (mm)	Depth (mm)	Overall Depth (mm)	M (mm)	N (mm)	
200	160	170	-	-	
300			-	-	
400			-	-	
300	200	210	269	115	
400					
500					
600	250	260	369	150	
400					
500					
600	300	310	469	150	
800					
600	400	410	469	150	
800					
1000	250	260	369	150	
1200	300	310	469		


5. EQUIPMENT

■ 5.1 Fixing equipment directly into the cabinet base (M8 screws)



5. EQUIPMENT (CONTINUED)

■ 5.1 Fixing equipment directly into the cabinet base (M8 screws) - or slide with M8 nut adjustment (optional)




Adjustment of equipment

Possible in M 600 x 600 cabinets.

With Cat. No. 0 367 43/44/45.

Set of 4 slides for cabinets with 250, 300 and 400 mm depth.

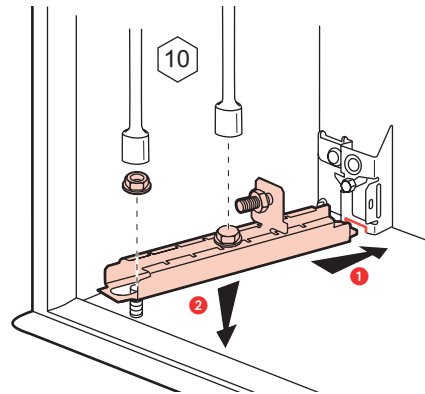

■ 5.2 Plain plates


• Galvanised steel plain plates



5. EQUIPMENT (CONTINUED)

■ 5.2 Plain plates (continued)

• Dimensions Plain plates

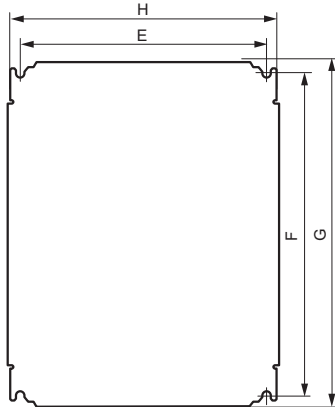

Cabinets	Plain plates		Usable equipment area (dm ²)	Fixing plates		Plain Cat. No.	Plate thickness (mm)
	Height	Width		F	E		
300	200	256	156	225	125	0 360 50	1.8
	300		6.2		225	0 360 69	
	400 ⁽¹⁾		8.2		325	0 360 52	
400	300 ⁽¹⁾	356	8.2	325	225	0 360 52	2
	400		11.7		325	0 360 72	
	600 ⁽¹⁾		18.7		525	0 360 56	
500	400	456	356	425	325	0 360 55	2
	500		19.2		425	0 360 71	
600	400 ⁽¹⁾	556	356	525	325	0 360 56	2.5
	500		23.6		425	0 360 84	
	600		29.7		525	0 360 57	
	800 ⁽¹⁾		40.7		725	0 360 59	
	1000 ⁽¹⁾		51.7		925	0 360 54	
700	500	656	456	625	425	0 360 58	2.5
800	600 ⁽¹⁾	756	556	725	525	0 360 59	
	800		55.7		725	0 360 60	
	1000 ⁽¹⁾		71.7		925	0 360 61	
1000	600 ⁽¹⁾	956	556	925	525	0 360 54	2.5
	800 ⁽¹⁾		70.7		725	0 360 61	
	1200 ⁽¹⁾		108.7		1125	0 360 65	
1200	600	1156	556	1125	525	0 360 85	2.5
	800		85.7		725	0 360 64	
1400	800	1356	100.7	1325	725	0 360 67	2.5



⁽¹⁾For use in horizontal (cabinets whose dimensions are reversed) or vertical mounting.

■ 5.3 Sectioned uprights and Lina 25 rails for building chassis

Lina 25 sectioned uprights


Cat. Nos 0 361 50/51/52/53/54/55/56

Cat. Nos 0 361 58/59



Cutttable sectioned uprights

Cat. Nos 0 361 92




⁽¹⁾Sawing point for 25 mm pitch uprights. The other two allow you to obtain the length of upright Cat. Nos 0 361 50/51/52/53/54/55/56.

Cabinet height (mm)	Upright length (mm)	Upright Cat. No. (set of 2)
300	237	0 361 50
400	337	0 361 51
500	437	0 361 52
600	537	0 361 53
700	637	0 361 54
800	737	0 361 55
1000	937	0 361 56
1200	1137	0 361 58
1400	1337	0 361 59
3 m length of upright to cut to size		0 361 92

5. EQUIPMENT (CONTINUED)


■ 5.4 Rails

Cat. No. 0 374 02




Cat. No. 0 367 80/81/82/83/84/85/86


Cat. No. 0 374 07



Cat. No. 0 477 22



Cat. No. 0 477 23



Cabinet width (mm)	Rail length (mm)	Rail catalogue number
300	243	0 367 80
400	343	0 367 81
500	443	0 367 82
600	543	0 367 83
800	743	0 367 84
1000	943	0 367 85
1200	1143	0 367 86

2 m rail to cut to length


Cat. No. 0 374 02 asymmetrical  in accordance with EN 60715

Cat. No. 0 374 07 symmetrical  depth 15 mm

Cat. No. 0 477 22 symmetrical  depth 7.5 mm with oblongs

Cat. No. 0 477 23 symmetrical  depth 15 mm with oblongs


Assembled chassis with uprights and Lina 25 rails

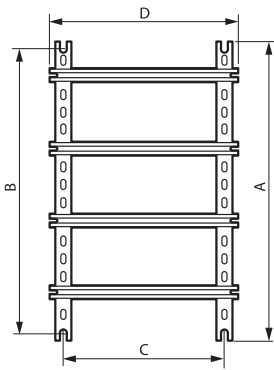

Assembled chassis with uprights and Lina 25 rails (continued)

Enclosure dimensions (mm)		Height of uprights	Rail length	Chassis fixing	
Height	Width			A	B
300	200	237	143	225	125
	300		243		225
	400		343		325
400	300	337	243	325	225
	400		343		325
	600		543		525
500	400	437	343	425	325
	500		437		425
600	400	537	343	525	325
	500		437		425
	600		543		525
	800		743		725
700	500	637	437	625	425
	600		543		525
800	800	737	743	725	725
	1000		943		925
	600		543		525
1000	800	937	743	925	725
	1200		1143		1125
	600		543		525
1200	800	1137	743	1125	725
1400		1337		1325	

■ 5.5 Metal internal doors RAL 7035 Cat. No. 0 363 xx



IP xxB

Steel, 1.2 mm thick steel for height up to and including 700 mm, 1.5 mm beyond.

Distance between cabinet door and internal door: 63 mm.

Reversible door.

Captive hinge axis.


Twin bar bolt: 1 bolt for height up to and including 600 mm, 2 bolts beyond.

Accept key-lock barrels and other inserts.

Cabinet dimensions (mm)		Dimensions H x W (mm)	Usable dim. H x W (mm)	Internal door Cat. No.
Height	Width			
400	300	334 x 248	235 x 155	0 363 15
500	400	434 x 348	335 x 255	0 363 16
600	400	534 x 348	435 x 255	0 363 17
700	500	634 x 448	535 x 355	0 363 18
800	600	734 x 548	635 x 455	0 363 19
		934 x 548	835 x 455	0 363 20
1000	800	934 x 748	835 x 655	0 363 21
		600	1134 x 548	1035 x 455
1200	800	1134 x 748	1035 x 655	0 363 23

5. EQUIPMENT (CONTINUED)

■ 5.6 Internal doors RAL 7035

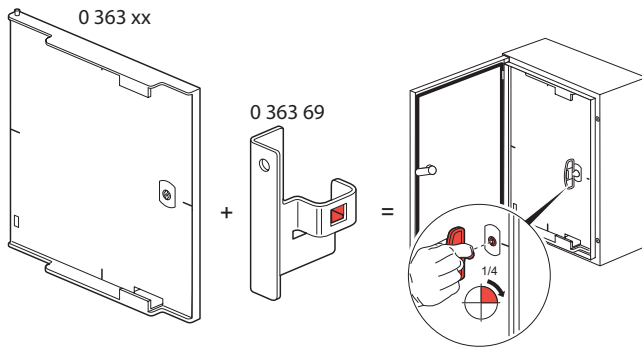

Fitted using Cat. No. 0 363 69.

IP xxB

Glass fibre loaded polyester, thickness: 4 mm

Self-extinguishing up to 960°C in accordance with IEC EN 60695-2-11.

Includes grid on rear face.

Centre marking on front face.

Distance between cabinet door and internal door adjustable: 39.5 - 58 mm for Atlantic cabinets.

Includes grip for left or right hand opening.

Captive hinge pins.


Twin bar bolt: 1 bolt for 400-600 mm height, 2 bolts for 700 mm height or greater.

Accept key-lock barrels and other inserts.

Cabinets H x W	Dim. (mm) Height x Width	Usable dims. (mm) Height x Width	Internal door Cat. Nos
400 x 300	341 x 236	305 x 185	0 363 59
500 x 400	441 x 336	405 x 250	0 363 60
600 x 400	541 x 336	505 x 250	0 363 61
700 x 500	642 x 436	500 x 340	0 363 62
800 x 600	742 x 536	600 x 440	0 363 63
1000 x 800	942 x 736	800 x 640	0 363 64
1200 x 800	942 x 736	800 x 640	0 363 65 ⁽¹⁾


⁽¹⁾Door identical to Cat. No. 0 363 64 with upper or lower reserve of 200 mm.

■ 5.7 Chassis with insulating faceplates in RAL 7035

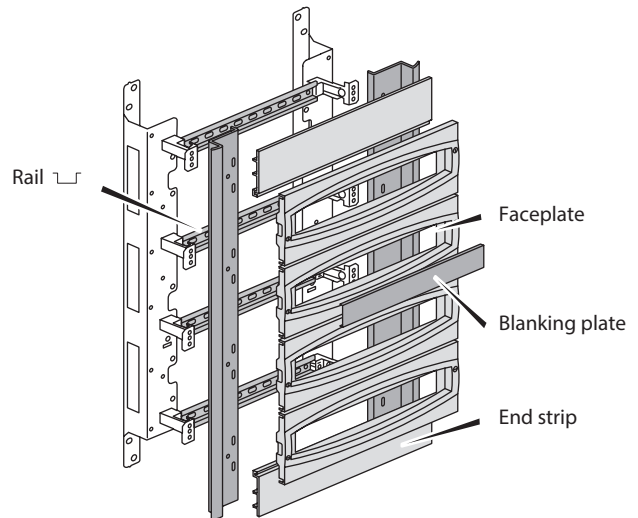

Cabinet	Chassis	
H x W x D (mm)	Cat. No.	Capacity
400 x 300 x 200	0 361 01	3 rows of 10 modules
500 x 400 x 200	0 361 02	3 rows of 16 modules
600 x 400 x 250	0 361 03	3 rows of 16 modules
700 x 500 x 250	0 361 05	4 rows of 21 modules
800 x 600 x 300	0 361 06	4 rows of 27 modules
1000 x 800 x 300	0 361 09	5 rows of 38 modules
1200 x 800 x 300	0 361 10	6 rows of 38 modules

Chassis mounting plate



Chassis		Mounting plate	
Cat. No.	H x W x D (mm)	Cat. No.	For power devices
0 361 06	800 x 600 x 300	0 360 44	DPX 125, DPX 160 ou Vistop 160A
0 361 09	1000 x 800 x 300	0 360 45	DPX 125, DPX 160 DPX 250 ER Vistop 160 A ou Vistop 250 A
0 361 10	1200 x 800 x 300		



5. EQUIPMENT (CONTINUED)

■ 5.8 VDI chassis

Allows 19" VDI equipment to be fitted into Atlantic cabinets of 600 or 800 mm width and with a min. depth of 250 mm.


For 400 mm width cabinets the chassis allows the inclusion of VDI equipment from the XL VDI mini cabinet.

May be fixed directly to the wall to produce a wall chassis (without a cabinet).

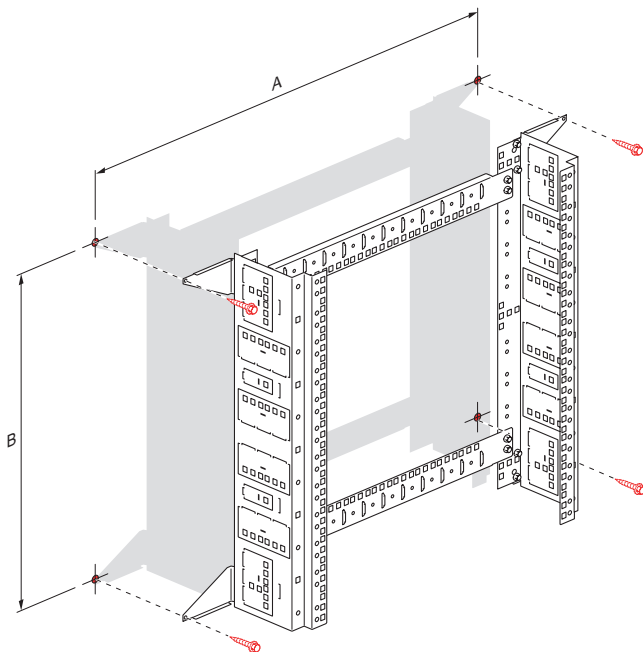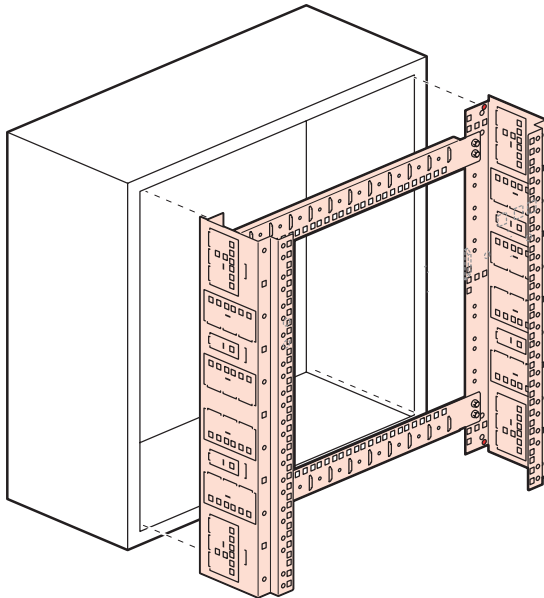

Cat. No.	A (mm)	B (mm)
0 462 27	725	325
0 462 28	725	525
0 462 29	725	725

■ 5.8 VDI chassis (continued)

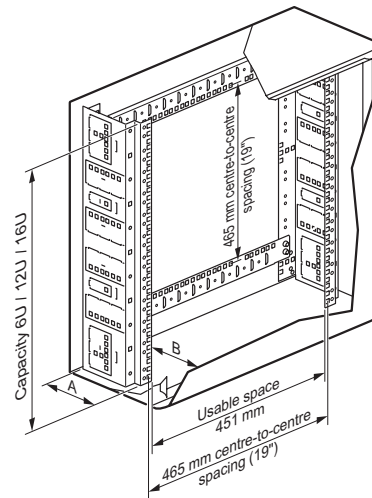

Atlantic Cabinets					
Chassis Cat. No.	Capacity	Cat. Nos	Dimensions	Usable dimensions below door	
				A (mm)	B (mm)
0 462 27	6 U	0 355 06	400 x 600 x 250	145	105
0 462 28	12 U	0 355 08 - 0 354 94	600 x 400 x 250		
		0 355 10	600 x 600 x 250		
		0 355 20	600 x 600 x 300		
		0 355 36	600 x 600 x 400		
0 462 29	16 U	0 355 21	600 x 800 x 300		
		0 355 14	800 x 600 x 250		
		0 355 23 - 0 354 96	800 x 600 x 300		
		0 355 28	800 x 600 x 400		
		0 355 15	800 x 800 x 250		
		0 355 24	800 x 800 x 300		

■ 5.9 Fixing the cabinet

Direct to the wall or with fixing lugs



Cat. No. 0 364 04




Cat. No. 0 364 06

5. EQUIPMENT (CONTINUED)

■ 5.9 Fixing the cabinet (continued)

Direct to the wall or with fixing lugs (continued)

Cat. No. 0 364 04

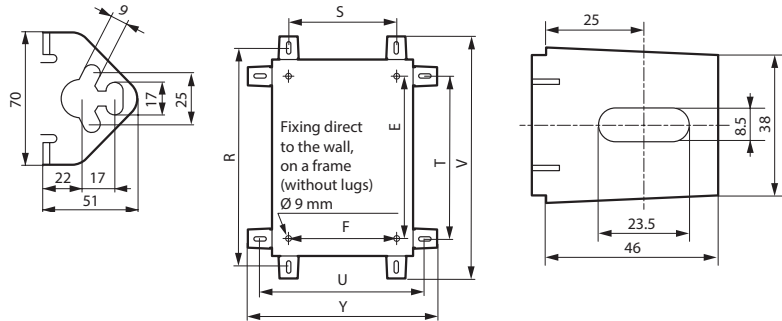

Direct to the wall or with fixing lugs

(dimensions in mm)

Cabinet dimensions (mm)		Vertical lugs 0 364 06		Centre-to-centre spacing	Horizontal lugs 0 364 06		Centre-to-centre spacing	Overall 0 364 06		Overall 0 364 04	
Height	Width	R	S	E	T	U	F	V	Y	V	Y
300	200	350	150	225	250	250	169	392	292	402	302
	300		250			350	269		392		402
	400		350			450	369		492		502
400	300	450	250	325	350	350	269	492	392	502	402
	400		350			450	369		492		502
	600		550			650	569		692		702
500	400	550	350	425	450	450	369	592	492	602	502
	500		450			550	469		592		602
600	400	650	350	525	550	450	369	692	492	702	502
	500		450			550	469		592		602
	600		550			650	569		692		702
	800		750			850	769		892		902
	1000		950			1050	969		1092		1102
700	500	750	450	625	650	550	469	792	592	802	602
	600		550			650	569		692		702
800	800	850	750	725	750	850	769	892	892	902	902
	1000		950			1050	969		1092		1102
1000	600	1050	550	925	950	650	569	1092	692	1102	702
	800		750			850	769		892		902
	1200		1150			1250	1169		1292		1302
1200	800	1250	750	1125	1150	850	769	1292	892	1302	902
1400		1450		1325	1350		1492	152			


Cabinet dimensions (mm)		Vertical lugs 0 364 04		Centre-to-centre spacing	Horizontal lugs 0 364 04	
Hauteur	Largeur	R	S	E	T	U
300	200	378	130	225	230	278
	300		230			378
	400		330			478
400	300	478	230	325	330	378
	400		330			478
	600		530			678
500	400	578	330	425	430	478
	500		430			578
600	400	678	330	525	530	478
	500		430			578
	600		530			678
	800		730			878
	1000		930			1078
700	500	778	430	625	630	578
	600		530			678
800	800	878	730	725	730	878
	1000		930			1078
1000	600	1078	530	925	930	678
	800		730			878
	1200		1130			1278
1200	800	1278	730	1125	1130	878
1400		1478		1325	1330	

5. EQUIPMENT (CONTINUED)

■ 5.9 Fixing the cabinet (continued)


Floor fixing on frame

Cat. No. 0 364 36, 0 364 37

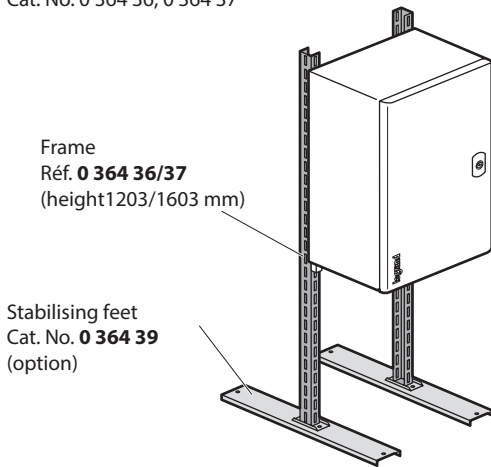


Fixing on post

Cat. No. 0 364 46/47/48/49

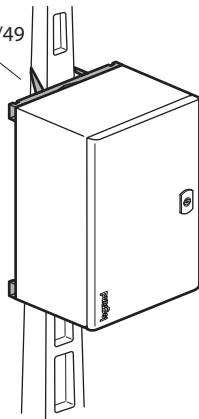


Floor fixing on plinth


Front and side vents
RAL 7021
Depth 300 et 400 mm

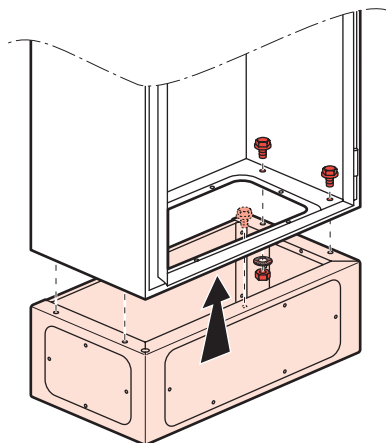

Front vent opening



View from below - Floor fixing




5. EQUIPMENT (CONTINUED)

■ 5.9 Fixing the cabinet (continued)

Floor fixing on plinth (continued)

View from above - Cabinet fixing

Side vent openings

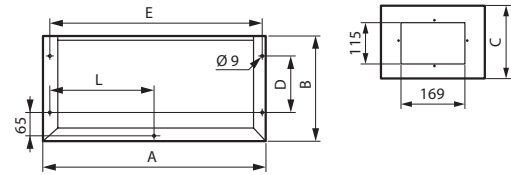


Cat. No.	Cabinets L x D (mm)	A	B	C	D	E	F	G	H	J	L
0 363 40	600 x 400	600	380	200	250	574	469	250	542	271	287
0 363 41	800 x 400	800				774	469		742	371	387
0 363 43	1200 x 400	1200				1174	469 x 2		1142	571	587
0 363 00	600 x 300	600	280	150	150	574	469	150	542	271	287
0 363 01	800 x 300	800				774	469		742	371	387
0 363 02	1000 x 300	1000				974	369 x 2		942	471	487
0 363 03	1200 x 300	1200				1174	469 x 2		1142	571	587

■ 5.10 Roofs

Steel RAL 7035

20 mm forward or backward adjustment

Cat. No.	A (mm)	B (mm)	C (mm)
0 365 55	200	160	80
0 365 58	200	200	100
0 365 51	300	200	100
0 365 52	400	200	100
0 365 53	400	250	125
0 365 59/67	500	200	100
0 365 64	500	250	125
0 365 65/68	600	200	100
0 365 54	600	250	125
0 365 56	600	300	150
0 365 66	800	250	125
0 365 57	800	300	150
0 365 60	800	400	200
0 365 61	1000	300	150
0 365 63	1200	300	150

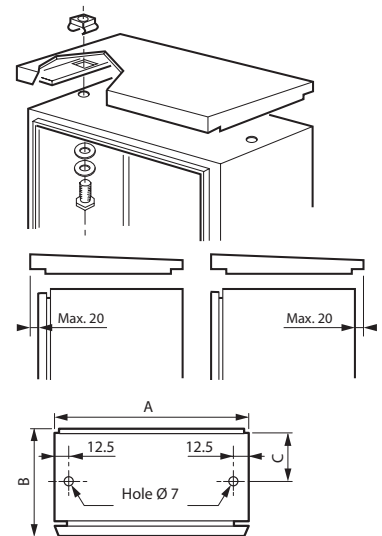

6. ACCESSORIES

■ 6.1 Cable entry plates

IP55 Cabstop plates


- Cable entries comprising a cable-clamp jaw providing mechanical grip and elastomeric zones providing sealing.
- May be pierced directly using the cable (no tool required).
- Fits perfectly around the cable.
- Cable replacement possible.
- Fire resistant polypropylene RAL 7035.
- The cable entry plates have several pierceable holes of various sizes: from Ø 5 to 14 mm, Ø 14 to 24 mm and reserved rectangular areas.

6. ACCESSORIES (CONTINUED)

■ 6.1 Cable entry plates (continued)

IP55 Cabstop plates (continued)


- Performance:
- Resistance to cutting oils ASTM no. 3
- Resistance to glow wire: 750°C in accordance with IEC 60695-2-11
- Resistance to tearing: 15 kg minimum
- Operating temperature: from -20°C to +65°C
- A foam seal with a 16 x 10 cross-section ensures sealing between the plates.

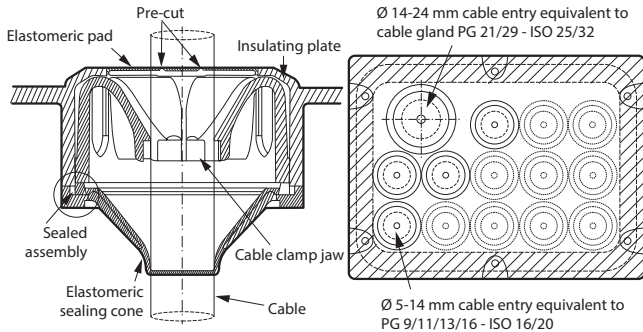

Good resistance to sodium chloride (15%), sulphuric acid (98%) and caustic soda (50%).


• Plate Cat. No. 0 364 94

- For 300 x 200 size cabinets
- 13 Ø 5-14 mm entries
- 1 Ø 14-24 mm entry




• Plate Cat. No. 0 364 95

- For 400 x 200/250 size cabinets
- 13 Ø 5-14 mm entries
- 1 Ø 14-24 mm entry
- 1 rectangular area 98 x 110




• Plate Cat. No. 0 364 96

- For 500 x 1000 x 250/300 size cabinets
- 28 Ø 5-14 mm entries
- 2 Ø 14-24 mm entries
- 1 rectangular area 97 x 110



• Plate Cat. No. 0 364 97

- For 600 x 250 to 400 size cabinets
- 800 x 250 to 400 and 1200 x 300/400
- 28 Ø 5-14 mm entries
- 2 Ø 14-24 mm entries
- 2 rectangular areas 97 x 145



• IP 43 cable entry plates with brush, Cat. No. 0 329 46

- For cabinet
- 600 or 800 mm width
- Usable opening 385 x 30 mm




• IP55 plate with multiple entry cable gland Cat. No. 0 329 47

- For cabinet
- 600 or 800 mm width
- Supplied with 12 cable gland, ISO 32 Cat. No. 0 980 50.
- Each cable gland is suitable for four UTP/FTP/SFTP cables (Ø 6.5 to 9.5 mm).
- Equipped leads may be passed through without disassembling the cable gland.
- Supplied with grommets for unused entries



■ 6.2 Hinged inspection windows



IP 54

Frame in anodised aluminium, 120° opening.


3 mm thick polycarbonate window. Neoprene seal.

Lock with key 455.

Supplied with cutting template.

Protect equipment, avoid inappropriate handling and allow viewing of the equipment at the front.

Cat. No.	External dimensions (mm)			Window dimensions (mm)		Usable Depth (mm)
	Height	Width	Depth	Height	Width	
0 475 45	300	400	50	230	330	42
0 475 46	400			330		
0 475 47	500	500		430	430	
0 475 48	600	400		530	330	
0 475 49		600			530	




Cat. No.	Dimensions (mm)			
	A	B	D	E
0 475 45	300	400	230	330
0 475 46	400		330	
0 475 47	500	500	430	430
0 475 48	600	400	530	330
0 475 49		600		530

■ 6.3 Adhesive plastic document holders

• Cat. No. 0 365 80, 340 x 235 mm

(Internal dimensions: 310 x 200 x 18 mm) and Cat. No. 0 365 81, 260 x 165 mm (Internal dimensions: 230 x 130 x 18 mm). Open RAL 7035.




• Cat. No. 0 365 82, 325 x 120 mm

(Internal dimensions: 324 x 120 x 18 mm) Closed IP50. RAL 9002. Capacity of 15 A4 sheets folded in 2.

6. ACCESSORIES (CONTINUED)

■ 6.3 Adhesive plastic document holders (continued)

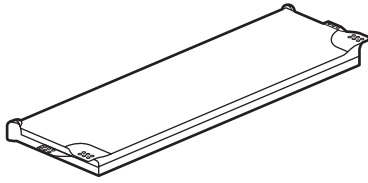

• **Cat. No. 0 097 99**, 305 x 220 mm (A4 format)
Flexible transparent.

■ 6.4 Door contact


• **Cat. No. 0 363 13**

3 A - 240 V

1 N/C contact - 1 N/O contact

Allows, for example, the air conditioning to be cut and the lighting to be switched on when the cabinet door is opened.

Supplied with fixing brackets.



■ 6.5 Lighting kit

• **Cat. No. 0 363 12**

Supplied with a Ø 16 mm 8W 230V 50 Hz fluorescent tube
Class I - IP20

Interference suppression to EN 50015

Equipped with a switch


Connection to strip

Dimensions: 350 x 61 x 37 mm

■ 6.6 Terminal block support

• **Cat. No. 0 367 36**


Set of two support brackets for copper bar or terminal block rail.

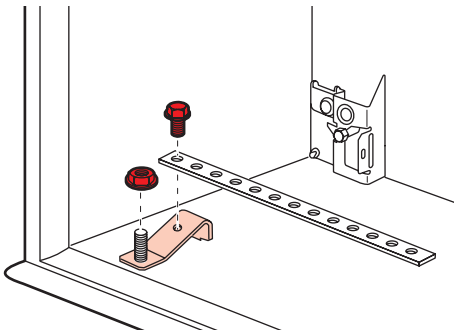


■ 6.7 Closures

Twin bar bolt.


Insert can be replaced by a key-lock barrel.




Number of locking points:




1 point



3 points



2 points

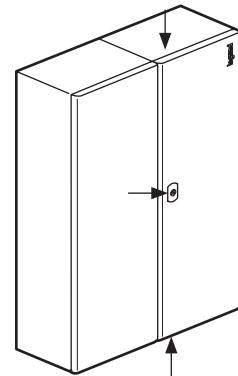

3 points

Cabinet dimensions (mm)		Number of locking points	Number of bolts
Height (mm)	Width (mm)		
300	200	1	1
300	300	1	1
300	400	1	1
400	300	1	1
400	400	1	1
400	600	1	1
500	400	1	1
500	500	1	1
600	400	2	2
600	500	2	2
600	600	2	2
600	800	1	1
600	1000	1	1
700	500	2	2
800	600	2	2
800	800	2	2
800	1000	3	1
1000	600	3	1
1000	800	3	1
1000	1200	3	1
1200	600	3	1
1200	800	3	1
1400	800	3	1

6. ACCESSORIES (CONTINUED)

■ **6.7 Closures (continued)**

Cat. Nos


0 368 04 Bolt



0 368 05 Handle with blank



0 368 06 Handle 2433A with key



Metal inserts

Cat. No.	Designation
0 368 13	6 mm square female
0 368 16	8 mm square male
0 368 17	6.5 mm triangular male
0 368 18	8 mm triangular male
0 368 19	11 mm triangular male (EDF)
0 368 20	Double bar

Key-lock barrel

Cat. No.	Key code
0 368 22	405
0 368 23	421
0 368 24	455
0 368 25	1242 E
0 368 26	2433 A
0 368 27	3113 A