



Gyro IsoSafe DimToWarm

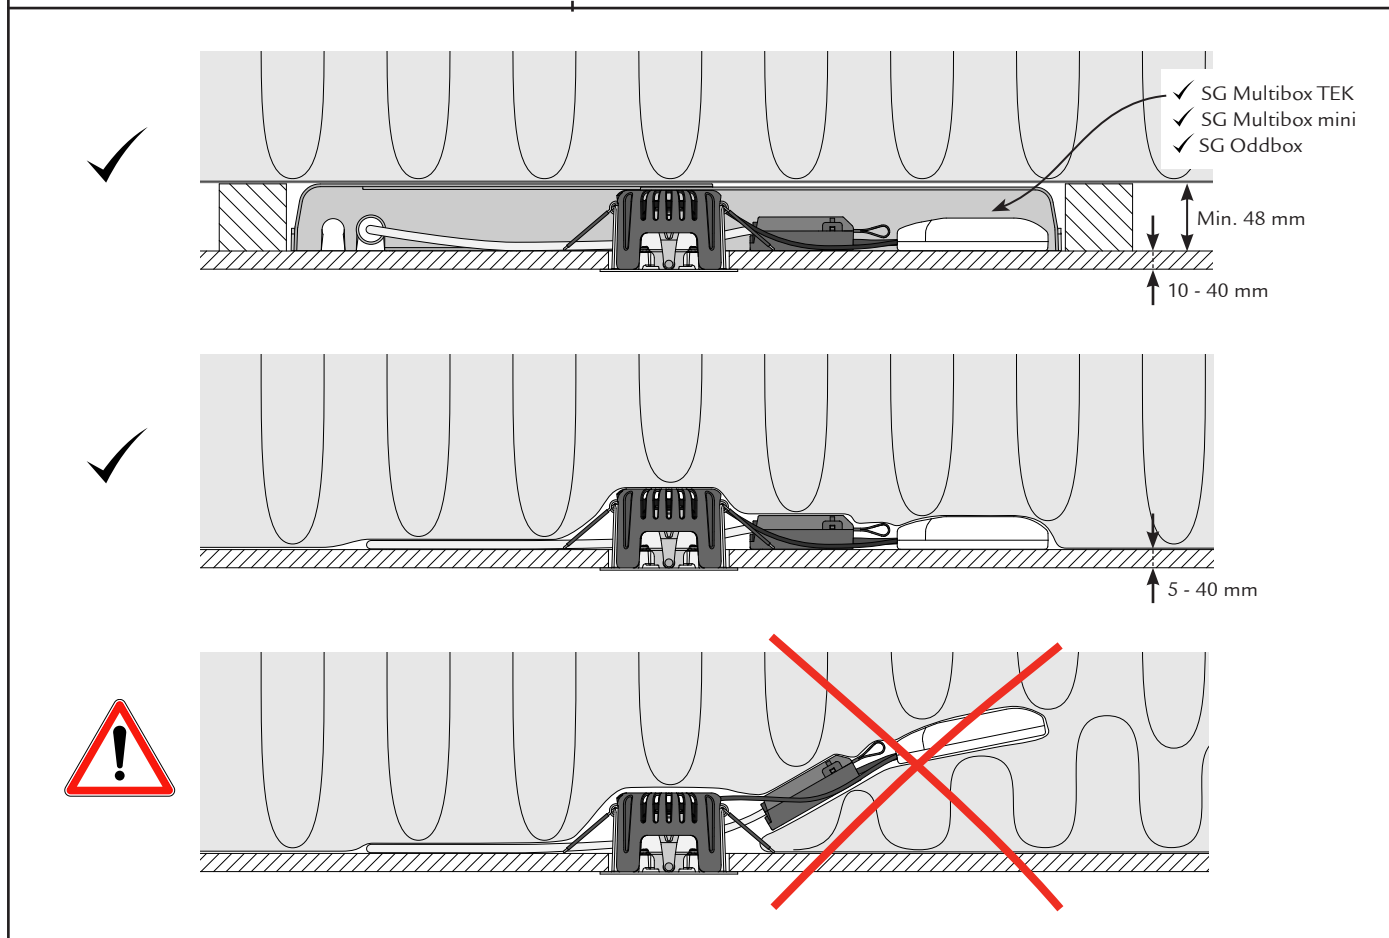

IP44*

Ø83 mm

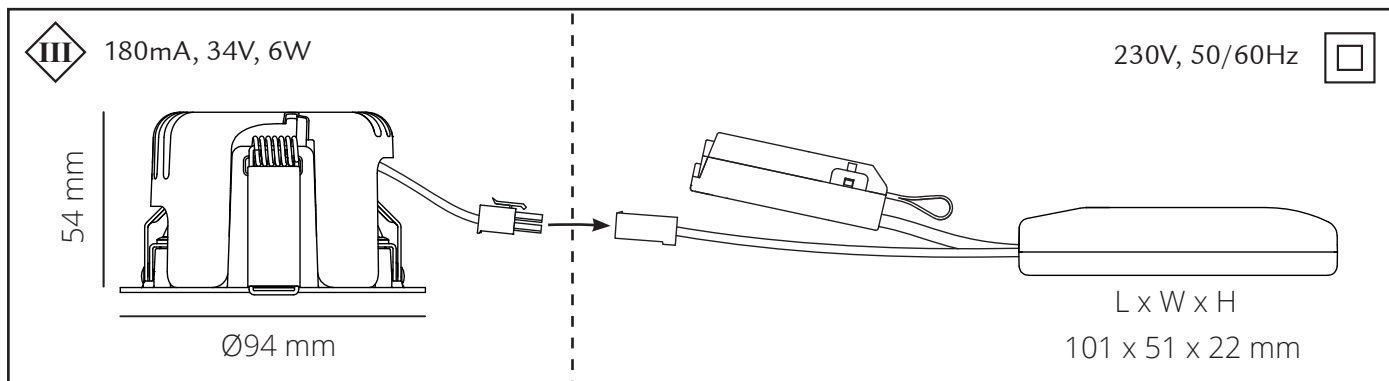

NO: Kan kun installeres av en registrert installasjonsvirksomhet
 EN: Only to be installed by an authorized electrician
 FR: Doit être installé par un électricien autorisé
 NL: Mag alleen geïnstalleerd worden door een bevoegde elektricien
 DE: Dieses Produkt darf nur durch autorisiertes Personal (z. B. Elektro-Installateur) angeschlossen und in Betrieb genommen werden

CORPORATE OFFICE:
SG Armaturen AS
 Svåbekk 15
 4790 Lillesand
 NORGE

BRANCH OFFICE:
 SG Lighting SA/NV
 Blokhuisstraat 47
 2800 Mechelen Noord I
 BELGIQUE/BELGIË

BRANCH OFFICE:
 SG Armaturen A/S
 Egebakken 19
 7400 Herning
 DANMARK

BRANCH OFFICE:
 SG Lighting SA/NV
 73 rue de Saint Mandrier
 83140 Six Fours Les Plages
 FRANCE

BRANCH OFFICE:
 SG Leuchten GmbH
 Postfach 67 04 21
 22344 Hamburg
 GERMANY

BRANCH OFFICE:
 SG Armaturen AB
 August Barksg. 30B
 421 32 Västra Frölunda
 SVERIGE

Tlf:+47 37 50 03 00
 firmapost@sg-as.no
 www.sg-as.no

Tlf:+32(0) 15 20 72 71
 info.benelux@sglighting.net
 www.sglighting.net


Tlf:+45 70 70 72 13
 info@sg-as.dk
 www.sg-as.dk

Tlf:+33(0) 4 94 93 00 00
 info.france@sglighting.fr
 www.sglighting.net

Tlf:+49 40 23 99 44 59
 info@sg-leuchten.de
 www.sg-leuchten.de

Tlf:+46 31 81 71 10
 info@sg-ab.se
 www.sg-ab.se

Rev: 20.04.2017

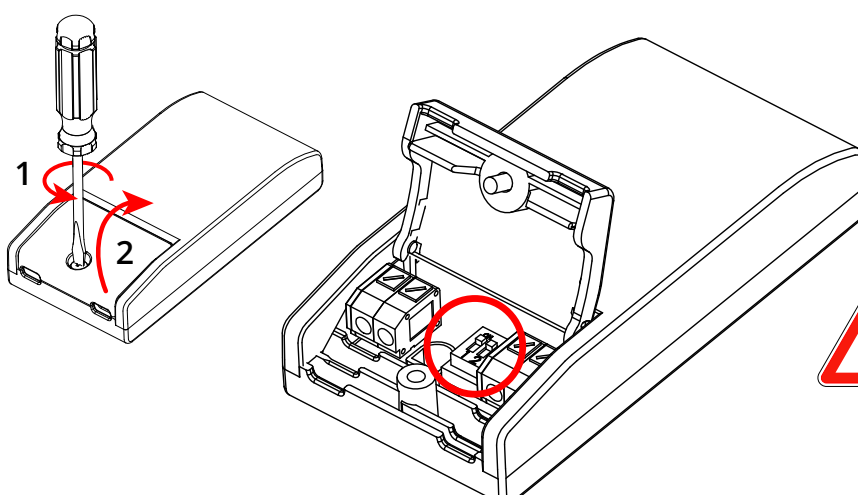

1 2

ON 1 2 180 mA (6W) ✓

~~ON 1 2 205 mA~~

~~ON 1 2 230 mA~~

~~ON 1 2 255 mA~~

! (Warning symbol)

°C (Temperature symbol)

0,5 - 1,0 mm² 8 mm

1,5 - 2,5 mm² 12 mm



ca. 10° (max. 20°)

Max. 16A

0,01m

* ↓ IP44 (crossed out) ↓ IP44

↑ IP44 ↑ IP44

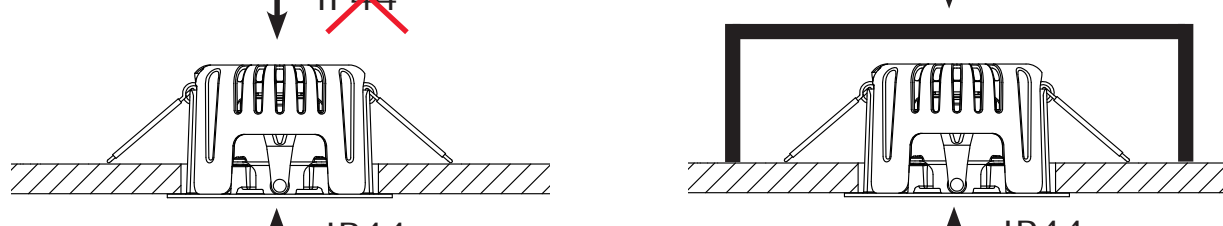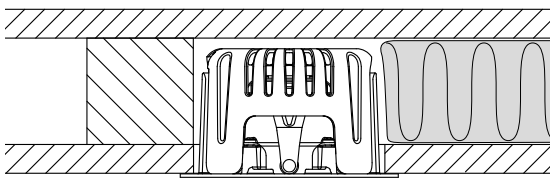✓

100% = 2800K

5% = 2000K