





LOGIC MINI W




 Correcte verwijdering van dit product (Elektrische & elektronische afvalapparatuur)
Comment éliminer ce produit (Déchets d'équipements électriques et électroniques)
Korrekte Entsorgung dieses Produkts (Elektronmüll)
Correct disposal of this product (Waste electrical & electronic equipment)
Eliminación correcta de este producto (Material eléctrico y electrónico de descarte)
Corretto smaltimento del prodotto (Rifiuti elettrici ed elettronici)

 Geschikt voor binnen- en buitengebruik, rekening houdend met opgegeven IP-waarden
Convient a usage intérieur et extérieur, prenant en compte l'IP indiquée
Eignet sich für innen- und aussenbereich, unter Berücksichtigung des angezeigten IP
Suitable for indoor and outdoor use, taking the indicated IP rating into consideration
Apto para uso interior y exterior en conformidad con el nivel IP indicado
Per utilizzo sia in interni che da esterni, da installare tenendo conto del suo grado di protezione (IP)

 Enkel geschikt voor toestellen op zeer lage spanning (minder dan 50V AC)
Convient uniquement pour les produits à très basse tension (moins de 50V AC)
Geeignet für Güter mit sehr niedriger Spannung (unter 50V AC)
Only suited for goods at very low voltage (below 50V AC)
Se recomienda únicamente para aquellos productos de tensión muy baja (menos de 50V AC)
Vale unicamente per i prodotti a tensione molto bassa (inferiore a 50V AC)

 Bevestiging wand inbouw
Montage mur encastré
Montage wand eingebaut
Fixation wall recessed
Montaje pared empotrado
Montaggio parete incasso


IP54 Beschermtd tegen stof - Spatwatervast
Protégé contre les poussières - Protégé contre les projections d'eau
Staubgeschützt - Geschützt gegen Spritzwasser
Dust-protected - Protected against splashing water
Protegido contra el polvo - Protegido contra salpicaduras de agua
Protetto contro la polvere - Protetto contro gli schizzi d'acqua



CAUTION!
CLEAN AT LEAST
QUATERLY WITH WATER
AND NON-ABRASIVE CLOTH

Logic Mini W

Manual/



Ø 55 x 50

LOGIC MINI W R ◊

304 30 12 ◊

◊ = A / W

INCL. 1 x POWERLED WHITE 0,5W / 3000K


EXCL. LED POWER SUPPLY 24V-DC

◊ CE 02 IP54

OPTIONS

CONCRETE BOX 188

LED POWER SUPPLY 24V-DC

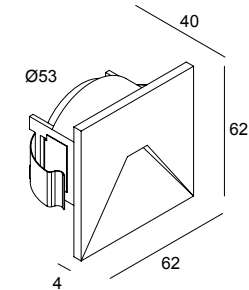

Ø 55 x 50

LOGIC MINI W S ◊

304 31 12 ◊

◊ = A / W

INCL. 1 x POWERLED WHITE 0,5W / 3000K

EXCL. LED POWER SUPPLY 24V-DC

◊ CE 02 IP54

OPTIONS

CONCRETE BOX 188

LED POWER SUPPLY 24V-DC

CE L.L.I.B./A4
A
DEEL
PARTIE
TEIL
PART
PARTE
PARTE


 DELTALIGHT®

HOLE PATTERN
 Ø55 x 50
 min. 12

Options

INSTALLATION		Ø60 x 65	Ø67 x 70
CONCRETE BOX 188			
CONTROL GEAR			
LED POWER SUPPLY		146 x 55 x 19	
24V-DC / 20W			
300 89 24 20			

Accessory Set

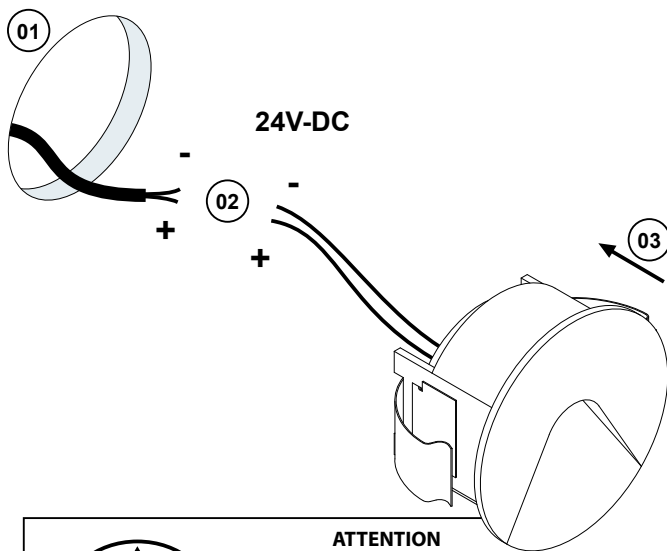

ATTENTION
 OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DISCHARGE SENSITIVE DEVICES

NO SECONDARY SWITCHING

WATERPROOF CONNECT

02

24V-DC

A

DEVICE

B

HEAT

DEVICE

RED or WHITE : +
 BLACK : -

24V DC

230/240V AC

LED POWER SUPPLY
 DELIVERED SEPARATELY
 Ref.: 300 89 24 20

MAX. 40 LED MODULES / POWER SUPPLY

CONNECTION OK CONNECTION

NOK CONNECTION

WARNING: PLACE SWITCH ON PRIMARY SIDE

! WARNING

ANY CLAIM TO A WARRANTY SHALL BECOME NULL AND VOID IF THE DEVICE IS NOT INSTALLED WITH THE SUITABLE BOX (OPTIONAL) PROVIDED BY DELTALIGHT N.V.