





▶ Abraçadeiras
plana c/prego aço
temperado - cabo plano


▶ Grapilla
c/clavo acero templado
- cable paralelo

▶ Cable clip
with hardened steel nail
- flat cable


▶ Attache
à clou en acier trempé
- câble méplat

	-25°C +90°C
	Material termoplástico Material termoplastico Thermoplastic material Matériel thermoplastique
	Cores Colores Colours Couleurs
	Aço temperado zincado Acero templado zincado Hardened steel zinc plated Acier trempé zingué



Ref.	CAB. (mm ²)	L x Ø (mm)	
702/0	2 x 0,75	15 x 1,5	200
702/1	2 x 1	15 x 1,5	100
702/2	2 x 1,5	25 x 2,0	100
702/3	2 x 2,5	25 x 2,0	100

- Prego de aço temperado para betão (Ks006)
- Clavo de acero templado para hormigón (Ks006)
- Quality hardened steel nail for concrete (Ks006)
- Clous en acier trempé pour le béton (Ks006).

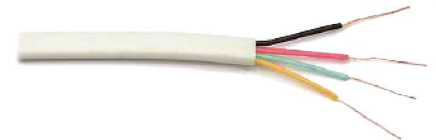




▶ Abraçadeira agrupável
tipo "Universal" para
alta temperatura


▶ Grapilla enlazable
tipo "Universal" para
alta temperatura

▶ Cable clip
"Universal" type
for high temperature

▶ Embase
type "Universel"
pour haute temperature

	-25°C +115°C
	Nylon
	Cores Colores Colours Couleurs



Ref.	Ø CAB. / TUB. (mm)	
031	16 - 22	50
032	25 - 28	50

+115°C

- Abraçadeira para alta temperatura
- Abrazadera para alta temperatura
- High temperature clip saddle
- Attache pour haute temperature

