

FLAT MOON 470 RECESSED LED 1-10V/PUSHDIM GI


Contemporary architectural projects love a minimalist, slim lighting design. Flat moon is a stylish, reduced height fixture (78 mm) that distributes a soft, yet functional light. Office-compliant when combined with one of the prismatic diffusers, it is also a perfect fit for public spaces, hotels, restaurants or retail environments. Exceptionally versatile, Flat moon can be either surface-mounted, recessed or suspended (with two types of suspension kits for either down or up/down lighter) and even directly mounted and connected onto the gear. It comes in three sizes: 450, 650 or 950 mm diameter.

Art. Nr. 13280109

SPECIFICATIONS

| | |
|-----------------|----------------------|
| Lamp | 1x med-power LED 26W |
| Gear / Transfo | LED gear incl. |
| Cut-out size | ø 450 h 150 |
| Weight | 4.45kg |
| Min. Distance | 0.1 m |
| Power supply | 230V |
| IP | IP20 |
| Glow Wire Test | 650° |
| Source lifetime | 50000 hrs |
| CRI | 90 |
| Lumen | 2546 Lm |
| Efficacy | 87 Lm/W |
| UGR | 23 |
| Adjustability | Not Applicable |

| | WARM WHITE 2700K / CRI 90+ | WARM WHITE 3000K / CRI 90+ | NEUTRAL WHITE 4000K / CRI 90+ |
|-------------|-------------------------------|-------------------------------|----------------------------------|
| black struc | 13280032 | 13280132 | 13280232 |
| white struc | 13280009 | 13280109 | 13280209 |

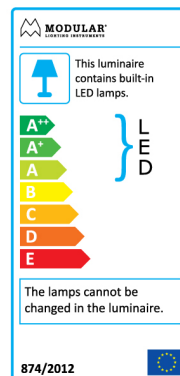

This label is available in other languages:
<http://supermodular.com/assets/TYPE2.pdf>

