


# Specification: Gyro IsoSafe DimToWarm



Article code: **5046 901233**  
EAN: 7021989012337




## Light technic

Type of light source: LED (not exchangeable)  
Wattage: 6W  
System wattage: 7,3W  
Luminous flux: 520lm  
Efficacy: 87 lm/W  
Voltage: 230V  
Colour temperature: 2000-2800K  
Colour rendering (CRI): Ra>95  
MacAdams factor: SDCM: 3  
Lifetime: L80/B20>50,000  
Light distribution: Direct  
Beam angle: 42°




## Control/Dimming

Type: Phase cut

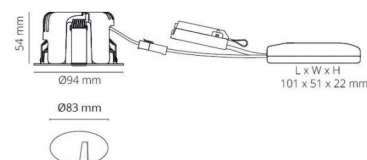

## Protection

Luminaire class: Class II  
Ingress protection rating: IP44  
Ta nominal: Ta=25°C

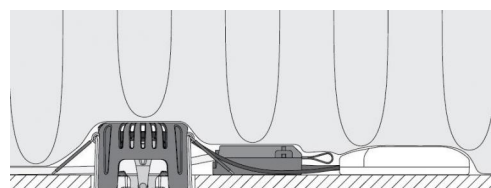

## Energy and approvals

Energy class: A++  
Approval: CE

## Materials and finish

Housing: Aluminium  
Colour: Black (RAL 9004)  
Optics: Glass

## Mounting/Connection

Mounting: Recessed  
Plug: Screwless terminal block

## Dimensions (mm)

Height (H): 56  
Diameter (D): 94  
Cut-out: 83  
Ceiling void depth: 54  
Distance to flammable materials: 0mm  
Weight (brutto/netto): 0.5

## Packaging

Packing dimensions: 115 x 115 x 95



7 0 2 1 9 8 9 0 1 2 3 3 7