

---

## Starters for series operation at 230 V AC



---

### Product features

- Temperature range for reliable cut-out: -20...+80 °C




# Product family datasheet


## Technical data

	Electrical data	Additional product data
Product description	Nominal wattage	Appropriate disposal acc. to WEEE
ST 151 LONGLIFE	22.0 W	Yes
ST 172 SAFETY DEOS <sup>1)</sup>		Yes

<sup>1)</sup> Temperature range for reliable switch-off: -20...+80 °C

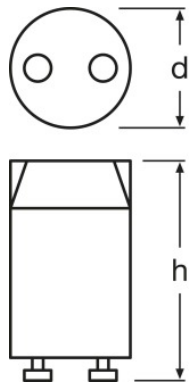

ST 151 LONGLIFE

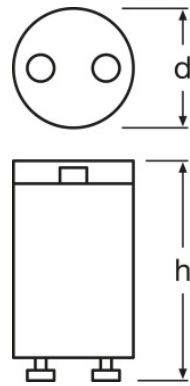

ST 172 SAFETY DEOS

## Product family datasheet

---

### Application advice

For more detailed application information and graphics please see product datasheet.

---

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300012803	ST 151 LONGLIFE	Shipping carton box 1200	400 mm x 235 mm x 325 mm	30.55 dm <sup>3</sup>	8362.00 g
4050300092638	ST 151 LONGLIFE	Shipping carton box 20	165 mm x 154 mm x 133 mm	3.38 dm <sup>3</sup>	308.67 g
4050300854083	ST 151 LONGLIFE	Shipping carton box 400	227 mm x 179 mm x 227 mm	9.22 dm <sup>3</sup>	2796.25 g
4050300854069	ST 172 SAFETY DEOS	Shipping carton box 200	227 mm x 98 mm x 227 mm	5.05 dm <sup>3</sup>	2098.50 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.