

UHO L TRIMLESS 93030 FBR

27217 9320 FBR

BESCHIKBAAR IN




ZWART 27217 9320 B

FLEMISH BRONZE 27217 9320 FBR

FLEMISH GOLD 27217 9320 FG

GOUD KLEUR 27217 9320 GC

WIT 27217 9320 W

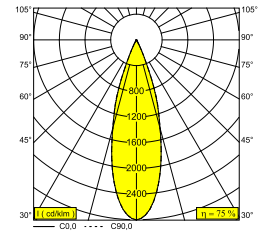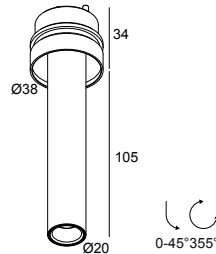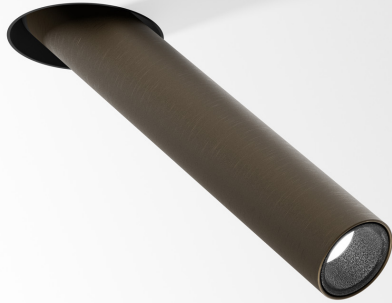

 [Bekijk op website](#)

Algemene info

LOCATIE	binnen
INSTALLATIE	Plafond Inbouw
ZAAGMAAT/OPENING (MM)	rond - Ø KIT
INBOUWDIEPTE (MM)	75
STOF EN WATERDICHTHEID	IP20
GEWICHT (KG)	0.2
RICHTBAARHEID	0° tot 45° zwenkbaar, 355° roteerbaar
INFO	REFLECTOR FL-30° EXCL.LED POWER SUPPLY 350-1050mA-DC UHO TUBE B included

Elektrische info

KLASSE	III
ENERGIE KLASSE	F

Info lichtbron

Lightsource Name	LED
Lichtbron	LED cluster 1-3,1W / CRI>90 (R9: 64) / 3000K / 123-327lm
TM-30-15 Waarden	Rf: 91 / Rg: 101
SDCM	SDCM3
Risk-groep	RG2
LM80	L90B10 > 120000
LED techniek (lichtbron)	327lm // 3,1W // 105lm/W
LED techniek (toestel)	246lm // 4W // 69lm/W

Benodigheden

MOUNTING KIT UHO L TRIMLESS
LED POWER SUPPLY 350 / 500 / 700 / 1050mA-DC DIM

Voor gedetailleerde montage gegevens, consulteer de handleiding: [27217_XXX0_HAND.pdf](#)

UHO L TRIMLESS 93030 FBR

27217 9320 FBR










PLAFOND COMPATIBILITEIT

Ceiling Type	Mounting Kit	
 System ceiling	 MOUNTING KIT UHO L TRIMLESS	Required
 Plasterboard	 MOUNTING KIT UHO L TRIMLESS	Required
 Stucanet	 MOUNTING KIT UHO L TRIMLESS	Required

UHO L TRIMLESS 93030 FBR


27217 9320 FBR

VERVOLLEDIG UW SPECIFICATIE

LED voedingen	#
 <p>300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1</p>	3->14 <input type="checkbox"/>
 <p>300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5</p>	3->14 <input type="checkbox"/>
 <p>300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL</p>	3->14 <input type="checkbox"/>
 <p>300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL</p>	3->14 <input type="checkbox"/>
 <p>300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1</p>	3->14 <input type="checkbox"/>
 <p>300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5</p>	3->14 <input type="checkbox"/>
 <p>300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL</p>	3->14 <input type="checkbox"/>
 <p>300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL</p>	3->14 <input type="checkbox"/>
 <p>300 48 700 ED1 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM1</p>	3->14 <input type="checkbox"/>


UHO L TRIMLESS 93030 FBR

27217 9320 FBR




300 48 700 ED5 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5

3->14




300 48 700 MDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W MDL

3->14




300 48 700 WDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W WDL

3->14




300 90 61 LED POWER SUPPLY MULTI-POWER DIM6

1->16/1->16/1->16




300 90 63 LED POWER SUPPLY MULTI-POWER DIM9

1->25 (25)/1->25 (25)/1->25 (20)/1->20 (13)




300 90 64 LED POWER SUPPLY MULTI-POWER DIM7

4->18 (15)/1->17 (10)/1->16 (7)




300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9

3->15/3->15/3->15




300 90 68 LED POWER SUPPLY MULTI-POWER DIM5

2->16 (15)/2->16 (10)/2->16 (7)



300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9

8->39 (39)/1->39 (28)/1->30 (20)




300 90 124 LED POWER SUPPLY MULTI-POWER DIM7

6->17 (15)/2->14 (10)/2->10 (7)

UHO L TRIMLESS 93030 FBR


27217 9320 FBR



300 90 125

LED POWER SUPPLY MULTI-POWER MINI DIM5


4->17 (15)/2->14 (10)/2->9 (7)



300 90 135

LED POWER SUPPLY MULTI-POWER HV


17->29/12->29/10->30/10->23



300 90 136

LED POWER SUPPLY MULTI-POWER HC DIM9


1->15 (13)



300 90 148

LED POWER SUPPLY 1050mA-DC / 22W


1->7 (4)



21012 0010

LED POWER SUPPLY MULTI POWER


6->15 / 4->15 / 4->15 / 4->13



21012 0021

LED POWER SUPPLY MULTI POWER DIM1


4->18 / 4->18 / 4->17 / 4->12



21012 0035

LED POWER SUPPLY MULTI POWER DIM5


4->18 / 4->18 / 4->18 / 4->12



21012 004W

LED POWER SUPPLY MULTI-POWER WDL


1->25 (25)/1->25 (25)/1->25 (20)/1->20 (13)



21012 005W

LED POWER SUPPLY MULTI-POWER COMPACT WDL

4->18/4->18/4->17/4->12



21012 0258


LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8

7->10



UHO L TRIMLESS 93030 FBR


27217 9320 FBR



21012 0268

LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8


10->14



21012 0278

LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8


6->9 / 6->9



21012 0288

LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8


12->18 / 12->18



21012 0298

LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8


3->15 / 3->14 / 3->9



21012 0308

LED POWER SUPPLY 350mA / 7,35W DIM8


5->7



21012 0318

LED POWER SUPPLY 500mA / 10W DIM8


5->7



21012 0328

LED POWER SUPPLY 700mA / 15W DIM8


5->7



21032 0295

LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5


3->14



21032 0305

LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

3->14



21032 0315

LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5


3->14



UHO L TRIMLESS 93030 FBR

27217 9320 FBR

Montage kit



15212 2060 MOUNTING KIT UHO L TRIMLESS



Notes: