

**M-LED 111 GE**

With the introduction of the in-house developed M-LED modules, we are preparing some of our icons for the future. The M-LED 111 module is replacing the AR111 lamp and comes in white structure or black matt. M-LED 111 is applicable for following 'AR111' (GE) luminaires: Bolster recessed, Nomad, Multiple, Multiple trimless, Lotis, Haloscan and Thub metal. Also fits AR111 modules of SL149, Multiple(x), Freeway, 2FLAT2C and Traffic. M-LED 70 is replacing the well-known AR70 lamp. The M-LED 70 module is applicable for 'AR70' luminaires such as Mini multiple and Haloscan 128.


Art. Nr. 11298624

**SPECIFICATIONS**

Lamp	1x LED Array		
Gear / Transfo	LED gear not incl.		
Weight	0.75kg		
Min. Distance	0.1 m		
IP	IP20		
Glow Wire Test	960°		
Power supply	350mA 31Vf	<b>500mA</b> <b>32Vf</b>	700mA 34Vf
Connected load	11W	<b>16.25W</b>	23.6W
Lumen	1057lm	<b>1418lm</b>	1584lm
Efficacy	96lm/W	<b>87lm/W</b>	67lm/W
UGR	15	<b>16</b>	17
Adjustability	Not Applicable		

This label is available in other languages:  
<http://supermodular.com/assets/TYPE2.pdf>

	WARM WHITE 2700K / CRI 90+			WARM WHITE 2700K / CRI +			WARM WHITE 3000K / CRI 90+			WARM WHITE 3000K / CRI +			NEUTRAL WHITE 4000K / CRI 90+			NEUTRAL WHITE 4000K / CRI +		
	SPOT 15°	MEDIUM 25°	FLOOD 40°	SPOT 15°	MEDIUM 25°	FLOOD 40°	SPOT 15°	MEDIUM 25°	FLOOD 40°	SPOT 15°	MEDIUM 25°	FLOOD 40°	SPOT 15°	MEDIUM 25°	FLOOD 40°	SPOT 15°	MEDIUM 25°	FLOOD 40°
black matt	11298002	11298102	11298202	11298302	11298402	11298502	11298602	11298702	11298802									
brushed alu	11298024	11298124	11298224	11298324	11298424	11298524	<b>11298624</b>	11298724	11298824									
white struc	11298009	11298109	11298209	11298309	11298409	11298509	11298609	11298709	11298809									

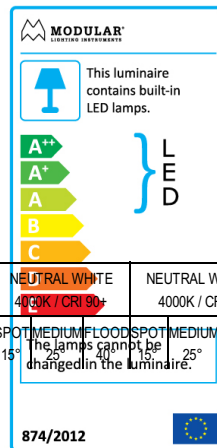

Modular reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on [www.supermodular.com](http://www.supermodular.com).