



Actinic BL TL 40W T12 ISL

Product family description

Actinic BL TL/TLD/T5 – optimized for electronic insect killer systems

With an optimized performance to attract most insects, Actinic BL TL, BL TLD and BL T5 lamps are the ideal choice for electronic insect killer systems. They are also suitable for photopolymerization and reprographic processes. A wide choice of wattages and a special 200-degree internal reflector version are available. In addition, Philips provides single-ended compact and T5 Actinic lamp versions as well as a circular Actinic lamp. For extra safety, there is a special shatter-proof “Secura” option which ensures that all the lamp’s glass and components are retained in a special outer sleeve in the case of accidental breakage. Hence, product designers have a high degree of flexibility in choosing the best fitting solution for their needs – including compact designs. What’s more, as a 100% lead-free and low-mercury product these lamps also provide a responsible environmental choice.

Product Features

- Emit long-wave UV-A radiation in the 350-400nm range
- UV-B/UV-A ratio less than 0.1 % (UV-B 280-315nm)
- 100% Lead free
- Low mercury

Product Benefits

- Perfectly matches the eye sensitivity of moving houseflies and in this way attracts more insects
- Safe to be used
- Best environmental choice


Application

- Insect traps

PHILIPS

- Electronic Fly Killers (EFK)

Product data	
Product Number	391532
Full product name	Actinic BL TL 40W T12 ISL
Ordering Code	391532
Pack type	Sleeve
Pieces per Sku	1
Skus/Case	25
Pack UPC	8711500260260
EAN2US	
Case Bar Code	8711500260277
Successor Product number	
Cap-Base	G13
Bulb	T12
Main Application	Reprography
Packing Type	
Packing Configuration	25
Useful Life	5000 hr
Life to 50% failures EM	9000 hr
Pack UPC	8711500260260
Case Bar Code	8711500260277
Ordering Code	ACTINIC BL TL4/10 SLV/25
Watts	40W
Lamp Voltage	101 V
Lamp Current	0.43 A
Color Code	10
Color Designation (text)	Actinic
Chromaticity Coordinate X	222 -
Chromaticity Coordinate Y	210 -
Overall Length C	1213.6 mm
Diameter D	
Case Height	8.460 in
Case Length	50.000 in
Case Width	9.250 in
Product Number	391532
Pack Height	1.500 in
Pack Length	48.000 in
Pack Weight	0.864 in
Pack Width	1.500 in





TL G13

Actinic BL TL/10/10-R G13




Actinic BL TL-D

PHILIPS

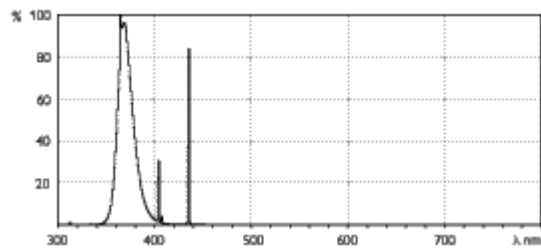


Actinic BL TL/10

Cap-Base G13

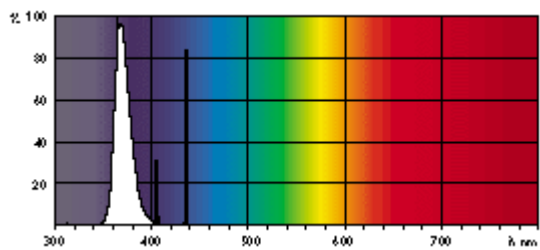

Actinic BL TL/10

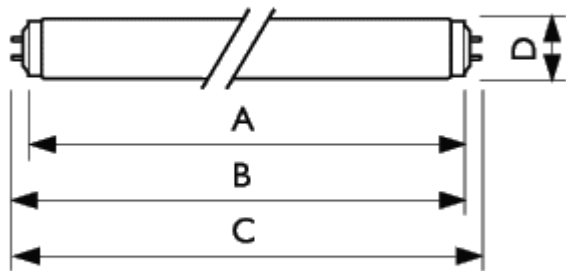

Actinic BL TL G13

	A	B	B	C	D
Full product name	Max	Min	Max	Max	Max
Actinic BL TL 40W/10 SLV	1199.4	1204.1	1206.5	1213.6	40.5



©2009 Koninklijke Philips Electronics N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Document order number : 0000 000 00000