

Sylvania Granit Sylsmart - NEW

GRANIT IP54 19500LM 840 WB SSA
0039770



Product features

- Integrated LED highbay; Black aluminium housing; 19500 Lm; 120 W; 163 Lm/W; 4000K; Drive current: 470mA; CRI 80; 85° beam angle; Sylsmart SSA - Connected; IP54; Lifespan L80:B50 90,000 hrs; suspension wires included.



NOTES

undefined

PRODUCT OVERVIEW

Product name	GRANIT IP54 19500LM 840 WB SSA
Technology	LED
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4357112
Warranty	5 years
Fixture luminous flux (lm)	19500
Luminaire efficacy (lm/W)	163
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	85
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	120
Electrical protection	Class I
Dimmable	Yes
Dimming method	SylSmart SSA
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9017 - Traffic black
IP rating	IP54
IK rating	IK08
Product EAN number	5410288397702

DATA TABLE

Sylvania Granit Sylsmart - NEW

GRANIT IP54 19500LM 840 WB SSA
0039770

General data

Product name	GRANIT IP54 19500LM 840 WB SSA
Technology	LED
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001716
E-number FI	4357112
Warranty	5 years

Optical data

Fixture luminous flux (lm)	19500
Luminaire efficacy (lm/W)	163
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	85
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	120
Mains voltage (V)	220-240V
Lamp power factor	0.90
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	10
Electrical protection	Class I
No. Of switching cycles before premature failures	>100000
Dimmable	Yes
Dimming method	SylSmart SSA
Drive current (mA)	470
Inrush Current (A)	125
Inrush Duration (µs)	122
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. Luminaires per 10A C Breaker	9
Max. Luminaires per 13A C Breaker	11
Max. Luminaires per 16A C Breaker	15
Max. Luminaires per 20A C Breaker	19
Max. Luminaires per 10A B Breaker	6
Max. Luminaires per 13A B Breaker	7
Max. Luminaires per 16A B Breaker	9
Max. Luminaires per 20A B Breaker	12
Mains surge immunity (differential mode - > L-N) (kV)	6

Sylvania Granit Sylsmart - NEW

GRANIT IP54 19500LM 840 WB SSA
0039770

Mains surge immunity (common mode -> 10
L/N - GND) (kV)

Lifetime data

Lifespan L80 B50	90000
Lifespan L80 B20	82000
Lifespan L90 B50	44000

Physical data

Housing colour	RAL 9017 - Traffic black
IP rating	IP54
IK rating	IK08
IK rating of sensor	IK03
Nominal Product Height (mm)	168
Nominal Product Diameter (mm)	298
Weight (kg)	2.908



Packaging

Single packaging type	Carton
Product EAN number	5410288397702
Packaging single length / height (cm)	32.5
Packaging single width (cm)	32.5
Packaging single depth (cm)	13.0
DUN14 (outer)	05410288397702
Units per outer package	1
Packaging outer length / height (cm)	32.5
Packaging outer width (cm)	32.5
Packaging outer depth (cm)	13.0

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

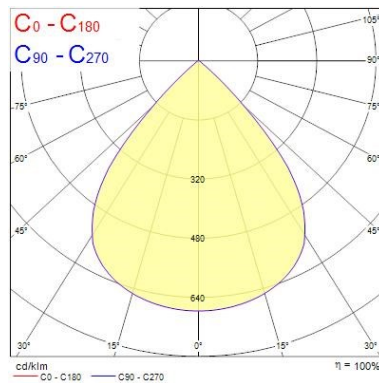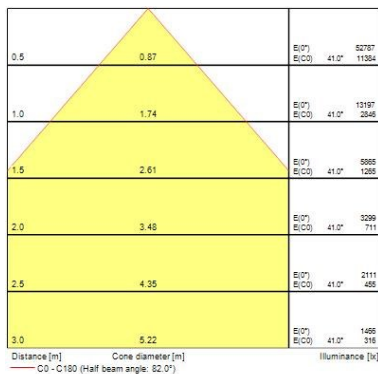

Sylvania Granit Sylsmart - NEW

GRANIT IP54 19500LM 840 WB SSA
0039770

TECHNICAL DRAWINGS

