


## Sylvania Granit 0-10V - NEW

Granit IP65 0-10V 26400lm 840 WB  
0039735



### Product features

- Integrated LED highbay; Black aluminium housing; 26400Lm; 165 W; 160 Lm/W; 4000K; Drive current: 720mA; CRI 80; 85° beam angle; 0-10V dimmable; IP65; IK08; Lifespan L80:B50 90,000 hrs; (D x H) 370 x 163 mm; 1.5 m mains cable; 1.5 m control cable; 1.2 m chain length including hooks.

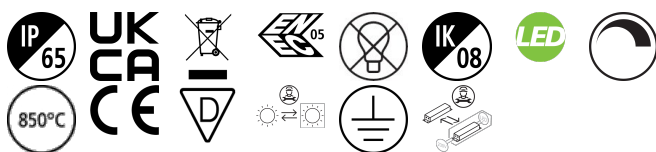

### NOTES

undefined

### PRODUCT OVERVIEW

Product name	Granit IP65 0-10V 26400lm 840 WB
Technology	LED
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4357101
Warranty	5 years
Fixture luminous flux (lm)	26400
Luminaire efficacy (lm/W)	160
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	85
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	165
Electrical protection	Class I
Dimmable	Yes
Dimming method	0-10V
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9017 - Traffic black
IP rating	IP65
IK rating	IK08
Product EAN number	5410288397351

### DATA TABLE

## Sylvania Granit 0-10V - NEW

Granit IP65 0-10V 26400lm 840 WB  
0039735

### General data

Product name	Granit IP65 0-10V 26400lm 840 WB
Technology	LED
General application	Logistics & Industry
Operating temperature range (°C)	-30°C...+50°C
ETIM Class	EC001716
E-number FI	4357101
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	26400
Luminaire efficacy (lm/W)	160
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	85
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	165
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class I
No. Of switching cycles before premature failures	>100000
Dimmable	Yes
Dimming method	0-10V
Drive current (mA)	720
Inrush Current (A)	100
Inrush Duration (µs)	300
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. Luminaires per 10A C Breaker	4
Max. Luminaires per 13A C Breaker	5
Max. Luminaires per 16A C Breaker	7
Max. Luminaires per 20A C Breaker	9
Max. Luminaires per 10A B Breaker	2
Max. Luminaires per 13A B Breaker	6
Max. Luminaires per 16A B Breaker	4
Max. Luminaires per 20A B Breaker	5
Mains surge immunity (differential mode - > L-N) (kV)	6

## Sylvania Granit 0-10V - NEW

Granit IP65 0-10V 26400lm 840 WB  
0039735

Mains surge immunity (common mode -> L/N - GND) (kV) 6

### Lifetime data

Lifespan L80 B50	90000
Lifespan L80 B20	82000
Lifespan L90 B50	44000

### Physical data

Housing colour	RAL 9017 - Traffic black
IP rating	IP65
IK rating	IK08
Nominal Product Height (mm)	163
Nominal Product Diameter (mm)	370
Weight (kg)	2.703


### Packaging

Single packaging type	Carton
Product EAN number	5410288397351
Packaging single length / height (cm)	40.0
Packaging single width (cm)	40.0
Packaging single depth (cm)	14.5
DUN14 (outer)	05410288397351
Units per outer package	1
Packaging outer length / height (cm)	40.0
Packaging outer width (cm)	40.0
Packaging outer depth (cm)	14.5

### Safety data

Optimal operating condition (°C)	-30-50
----------------------------------	--------

## PHOTOMETRY

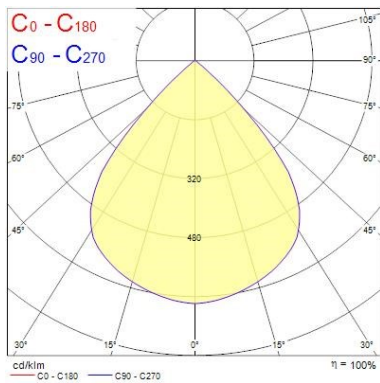

Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>1</sub> [lx]	E <sub>2</sub> [lx]
0.5	0.89	6956	41.7°	14638
1.0	1.78	1739	41.7°	3659
1.5	2.67	773	41.7°	1625
2.0	3.56	430	41.7°	915
2.5	4.45	274	41.7°	598
3.0	5.35	193	41.7°	437

Distance [m] Cone diameter [m]  
C0 - C180 (Half beam angle: 83.4°) Illuminance [lx]