

SMART LOTIS 160 DIFFUSE IP54 LED GE


Smart lotis is the best known fixture within the Smart family. The deeply recessed cone which holds the light source inspired the designers to create a very versatile spot to be combined with multiple accessories. This family's styling is based on our most popular designs. Concretely this means that the luminaires consist of a module (LED or halogen) which can be combined with one of three trims to suit your needs. The new spotlights can be combined with Smart mask, Smart surface box or Smart surface tubed to form the perfect solution for any interior. Choose a white, black or gold finishing. Also available in different sizes, fix and adjustable, IP version, ...

Art. Nr. 13015232

SPECIFICATIONS

Lamp	1x LED Array					
Gear / Transfo	LED gear not incl.					
Cut-out size	ø 146 h 250					
Weight	0.88kg					
Min. Distance	0.1 m					
IP	IP54					
Glow Wire Test	960°					
CRI	90					
Power supply	500mA	700mA	900mA	1050mA	1200mA	1400mA
	32.1Vf	33.6Vf	34.2Vf	34.6Vf	35Vf	35.5Vf
Connected load	16W	23.5W	30.8W	36.3W	42W	49.7W
Lumen	1482lm	2017lm	2504lm	2896lm	3252lm	3745lm
Efficacy	93lm/W	86lm/W	81lm/W	80lm/W	77lm/W	75lm/W
UGR	22	23	24	24	25	25
Adjustability	Not Applicable					

	WARM WHITE 2700K / CRI 90+	WARM WHITE 3000K / CRI 90+	NEUTRAL WHITE 4000K / CRI 90+
	WIDE FLOOD 80°	WIDE FLOOD 80°	WIDE FLOOD 80°
black struc	13015032	13015132	13015232
white struc	13015009	13015109	13015209

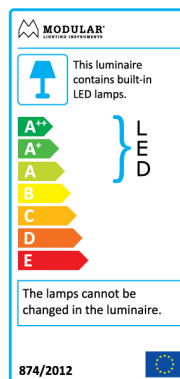

This label is available in other languages:
<http://supermodular.com/assets/TYPE2.pdf>

